

MZ-TH 97-35

χ loops

A Program Package calculating One- and Two-Loop Feynman Diagrams

L. Brücher, J. Franzkowski, D. Kreimer

October 1997

L. Brücher¹, J. Franzkowski², D. Kreimer³

Institut für Physik
Johannes Gutenberg-Universität Mainz
Staudingerweg 7
D-55099 Mainz
Germany

¹e-mail: bruecher@dipmza.physik.uni-mainz.de

²e-mail: franzkowski@dipmza.physik.uni-mainz.de

³e-mail: kreimer@dipmza.physik.uni-mainz.de

Contents

1	Introduction	5
2	Preliminaries	7
3	Quick reference	11
4	Detailed description	19
5	Conclusion and outlook	61
	Appendix	63
A	Examples	65
B	Technical details	75
	Bibliography	81
	Index	83

1 Introduction

1.1 Intention

The aim of *χloops* is to calculate one-particle irreducible Feynman diagrams with one or two closed loops for arbitrary processes in the Standard model of particles and related theories. Up to now this aim is realized for all one-loop diagrams with at most three external lines and for two-loop diagrams with two external lines.

The results can be returned both algebraically and numerically. All necessary tensor integrals are treated for arbitrary masses and momenta. Those two-loop two-point functions for which no analytic result is known are integrated numerically by *χloops*.

The calculations are performed in **Maple V** – a language for symbolic computations [1, 2]. Numerical integrations are done using **VEGAS** – a procedure for adaptive Monte Carlo integration [3, 4]. For convenient input *χloops* has an **Xwindows** interface based on **Tcl/Tk** [5].

The package consists of the following parts:

- ▷ **Input via Xwindows interface:**
In a window the user selects the topology which shall be calculated. A Feynman diagram pops up in which the particle names have to be inserted.
- ▷ **Processing with Maple:**
The selected diagram is evaluated. The necessary steps for reducing the numerator ($SU(N)$ algebra, Dirac matrices) are performed. The result is expressed in terms of one- and two-loop integrals.
- ▷ **Evaluation of one-loop integrals:**
One-loop one-, two- and three-point integrals are calculated analytically or numerically to any tensor rank using **Maple**. This part was already released separately [6, 7].
- ▷ **Evaluation of two-loop integrals:**
All two-loop two-point topologies including tensor integrals are supported by the **Maple** routines. For those topologies where no analytic result is known, *χloops* creates either an analytic two-fold integral representation or integrates numerically with the help of **VEGAS** using **C++** [8]. A parallelized implementation of the **VEGAS** algorithm invented by R. Kreckel [9, 10] is part of this distribution.

The other topologies can be calculated analytically or numerically like one-loop integrals.

In the second chapter we briefly denote how to install and start the program. Chapter three gives several examples for quick and easy usage. A more detailed description of the user-interface can be found in chapter four of this manual.

1.2 Copyright

The copyright of this program package is owned by the Johannes Gutenberg-Universität Mainz, Germany.

$\chi loops$ is “*cite-ware*”. That means that you can freely use and redistribute it, but you have to cite $\chi loops$ if you publish any results that you achieved with the help of it.

Any further program development which intends to use the name $\chi loops$ or the incorporation of $\chi loops$ or a part of the $\chi loops$ code into any other program needs the permission of the authors.

With the receipt of $\chi loops$ the customer accepts that he uses the program entirely on his own risk. Neither the authors nor the distributors of $\chi loops$ are liable for any loss or damage as a result of any use which is made of this program.

1.3 Comments and bug reports

$\chi loops$ is still under development. So if you have questions, comments or if you have found any bug – please don’t hesitate to contact

`xloops@thep.physik.uni-mainz.de`

or one of the authors.

2 Preliminaries

2.1 Requirements

xloops can be used on any computer where Maple V is working. If Maple is not yet installed on your computer system you have to do that first. For numerical integration of two-loop integrals a compiler for C++ is necessary. The Xwindows interface needs Tcl/Tk and is at present only available for Unix. On other platforms or if Tcl/Tk is not installed the Xwindows interface will not work. In this case you can use the Maple part directly (cf. sect. 2.4 and 2.5). The Maple part covers most features of the *xloops* package but the input may be found not as user-friendly as if the interface is used.

2.2 Installation

The distribution of the *xloops* package is accessible via WWW at

<http://wwwthep.physik.uni-mainz.de/~xloops/>

It consists of one packed (tared, gzipped) file

`xloops-1.0.tgz`

This file contains all files needed for *xloops*. To install the package unpack `xloops-1.0.tgz`:

```
tar -xzf xloops-1.0.tgz
```

xloops then automatically creates a subdirectory of the current directory which is called `xloops`. The package is then deposited there. In addition there will occur several subdirectories of `xloops`. A complete list of all files in the distribution is given in appendix B.4. Moreover, there exists an additional (tared, gzipped) file

`xloops-lib.tgz`

in the same directory as `xloops-1.0.tgz` which contains a library of one-loop diagrams (cf. sect. 4.5). For convenience one should unpack this file in the same directory where `xloops-1.0.tgz` was unpacked before. *xloops* will read from this library whenever a one- or two-loop integral has to be evaluated. If this library is missing *xloops* will create the necessary files automatically, but this will usually take some time. If you have the `bash` shell type

```
cd xloops/  
configure
```

This will settle the configuration of the Xwindows interface. `configure` will request

- ▷ the release of Maple V (1, 2, 3 or 4) you are using. There were subtle changes from release 2 to 3 in handling local and global variables, therefore it is important to select the correct option. Since we tested only Maple V release 1 and 3, for release 2 and 4 `configure` internally does the following replacement:

release 2: use the same files as for release 1

release 4: use the same files as for release 3 (with some patches)

which is expected to be consistent.

- ▷ the WWW browser which should be used for the on-line html version of this manual. The name of the executable (cf. `netscape`, `mosaic`, ...) must be inserted.
- ▷ the character encoding of your terminal (Isolatin 1 or standard ascii).
- ▷ whether multiprocessing is enabled. This question is necessary to choose between normal VEGAS or the parallelized version of VEGAS running on multiprocessor computers only. If multiprocessing is enabled the number of processors is requested.
- ▷ the platform. Several frequently used systems (Linux, Digital Unix, SUN Solaris, IBM AIX) are distinguished from other Unix to install the right `Makefile` for the numerical integration.
- ▷ whether a library of one-loop integrals should be build. It can take a lot of time (up to an hour) on slower computers to build the whole library. Therefore it is recommended not to do that, but to load a pre-built library `xloops-lib.tgz` from our WWW server instead.

After that several checks are performed. First an embarrassing bug occuring in Maple releases up to release 3 is tested: If a file is read in a procedure, no output of the procedure will appear. Therefore we have written a little workaround for this bug, which can be installed by the user.

`configure` continues with a test run of the `Makefile` which is needed for numerical integrations. This `Makefile` depends on the platform. The run will take some time.

Finally you are asked to agree that automatically a mail is sent to the developer team of the `xloops` package. This mail is understood as registration of your `xloops` installation.

A typical run of `configure` is given in appendix A.1. `configure` automatically creates the `xloops` executable file.

If you have root access you can make it executable for all users. You then can set a symbolic link to `/usr/bin`, i.e.

```
cd /usr/bin
ln -s <directory>/xloops/xloops .
```

where `<directory>` is the directory where `xloops` was installed.

If you don't have `bash` you can find the necessary instructions in the file `README` which is part of the `xloops` distribution.

2.3 Getting started

You can now type

`./xloops`

from the directory where *xloops* was installed before. This starts your *xloops* session. The *main window* of *xloops* (cf. fig. 3.1) will appear. If *xloops* was made executable for all users (cf. previous section) it can be started with

`xloops`

from any directory.

There is on principle no restriction in the number of *xloops* sessions which can be used simultaneously – by the same user or by different users. On the other hand the numerical integration with VEGAS should be used only once by each user (cf. sect. 4.6).

2.4 Installing the Maple part only

If you are only interested in the Maple routines you have to start the installation as in sect. 2.2, but you then skip `configure` and just copy all files with extension `.ma`

- ▷ `loops.ma`
- ▷ `fmrules.ma`
- ▷ `fmuser.ma`
- ▷ `evalproc.ma`
- ▷ `oneloop.ma`
- ▷ `cfcn.ma`
- ▷ `pv.ma`
- ▷ `r.ma`
- ▷ `simple.ma`
- ▷ `twoloop.ma`
- ▷ `numint.ma`
- ▷ `values.ma`
- ▷ `unvalue.ma`
- ▷ `mess.ma`

in one directory instead and delete the rest of the distribution. The correct `.ma` files you can find in the subdirectory `xloops/MapleVR1` – if you use release 1 or 2 – or in the subdirectory `xloops/MapleVR3` – if you have release 3 or higher.

2.5 Usage within a Maple session

You can use *χloops* within an ordinary Maple session as well: After having started Maple just type the following lines:

```
LoopPath:=⟨path⟩;  
read'⟨path⟩loops.ma';
```

⟨path⟩ describes the directory where the *.ma* files are located. If the *χloops* package is installed properly this should be the path of the *χloops* directory to which you have to add **MapleVR1** – if you are using release 1 or 2 of **Maple V** – or **MapleVR3** – if you are using release 3 or higher. If the *.ma* files were copied to the current directory before you can skip the assignment of **LoopPath** and only type

```
read'loops.ma';
```

Now you can use the functions described in chapter 4.

3 Quick reference

3.1 Main window

After having typed the command `xloops` the *main window* (cf. fig. 3.1) appears on the screen. It consists of three parts:

1. The *menu bar* which contains several menus for *xloops* commands (for details cf. sect. 4.1.1).
2. The *topology bar* which displays all possible topologies for a definite m -loop n -point function. The selection of m closed loops and n external lines is done with the help of the menus **Loops** and **Ext. Lines**.
3. The *text window* with scroll bar which contains the results of calculations.


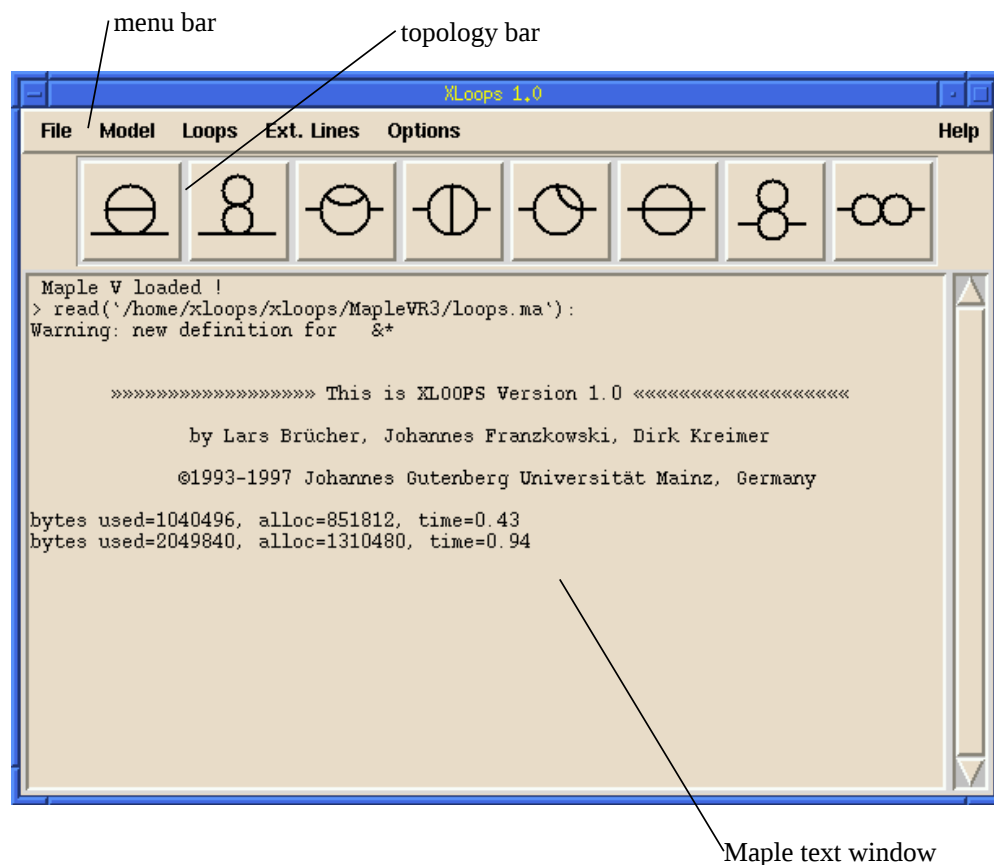


Figure 3.1: *Main window*

Before we will explain the functions and their meanings in detail in the next chapter, we demonstrate here as an example how to use *χloops* for the calculation of a two-loop self-energy diagram and a one-loop vertex correction.

3.2 Two-loop self-energy

We now perform the calculation of a diagram which contributes to the Higgs self-energy Σ at the two-loop level:

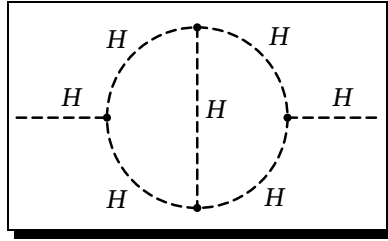

The underlying topology is the master topology, which is located in the fourth place in the *topology bar* (cf. fig. 3.1). In this case the number of external lines and the number of closed loops is already fixed correctly, so one now has just to click on the topology.

Then the master topology appears in a separate window, the *diagram window* (cf. fig. 3.2). In this window for each internal and external particle the corresponding particle name has to be inserted. Only particles can occur here, no antiparticles. The allowed terms for particle names are listed in sect. 4.2.4. They can be obtained alternatively with the menu **Help**. The flow of charges and fermion or ghost numbers is determined by the arrows of the lines. The direction of an arrow is reverted with a click on it.

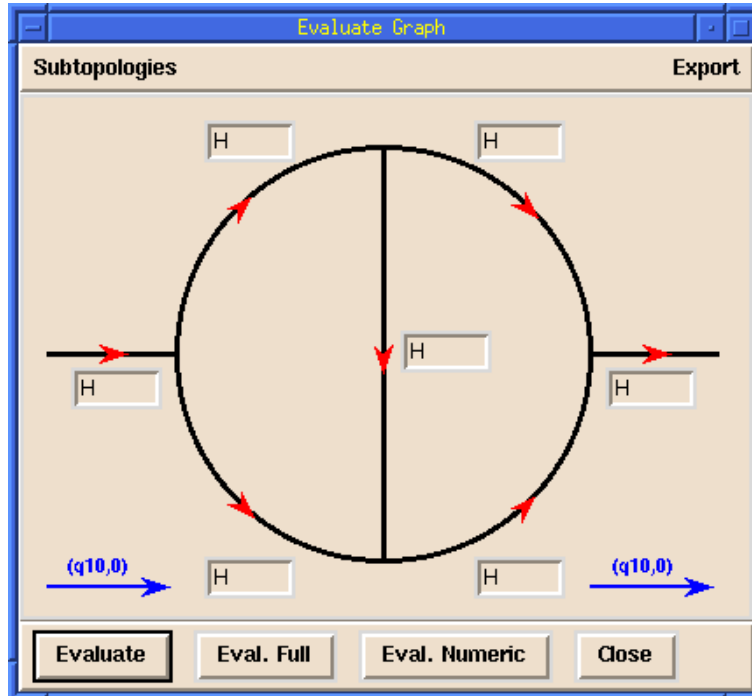


Figure 3.2: The diagram for the two-loop Higgs self-energy

Since in our example we have to deal only with chargeless scalars, the direction of arrows is meaningless and we have to insert the name `H` or `higgs` for each particle only.

For the sake of clearness, the flow of external momenta in our conventions is displayed in blue. In this example there is only one momentum

$$\mathbf{q_1} = (q_{10}, 0, 0, 0) = (q_{10}, 0).$$

Vanishing components are put together to a common zero-vector. In our case there exists only one parallel space component q_{10} . The orthogonal space is represented through a common 0.

When all particles are inserted, χloops is ready for calculation. The *diagram window* gives you the possibility to select different modes of evaluation.

- ▷ Click on the Evaluate button: The output – for simplicity – is returned in terms of `Oneloop` and `Twoloop` functions which correspond directly to one-loop and two-loop functions explained in sect. 4.3 and 4.4. In our example the result consists only of the scalar master two-loop two-point function which χloops calls `Twoloop2Pt2`:

```
> G1 := EvalGraph2 (7, [higgs,higgs,higgs,higgs,higgs,higgs,higgs,higgs,higgs,
> higgs,higgs,higgs] );

G1 := [

      81          8 4          2 2          2          2 2 2
C1 = ---- I Mhiggs e (1 + 2 eps Ln(4 Pi MU ) + 2 eps Ln(4 Pi MU ) )
      8192

      Twoloop2Pt2(0, 0, 0, 0, 0, q10, Mhiggs, Mhiggs, Mhiggs, Mhiggs, Mhiggs)

      /
      / (sin(tw) Mw Pi ),
      /

C1]
```

Generally, the output is decomposed in one or several form factors `C1`, `C2`, ... to reflect the Dirac γ or Lorentz structure of the result. Therefore the result is a list of form factors. The last entry in this list is the defining equation for the form factors. In our example of a scalar self-energy there appears only one form factor `C1` and the defining equation is just the scalar `C1`. A more complicated situation can be found in the next section (for details cf. sect 4.2.10).

Moreover χloops assigned the whole result to a variable `G1`. Within an χloops session each calculation will get such a name in an unique way. This gives the user the opportunity to perform further calculations with the results of diagrams, for instance to sum up all evaluated graphs which contribute to the same process.

- ▷ Click on the Eval. Full button: χloops evaluates directly the `Oneloop` and `Twoloop` integrals. Now each form factor `C1`, ... is a Laurent expansion in terms of the ultra-violet regulator ε , where the significant coefficients of this expansion – $\mathcal{O}(\varepsilon^{-1})$, $\mathcal{O}(\varepsilon^0)$ in the one-loop case, $\mathcal{O}(\varepsilon^{-2})$, $\mathcal{O}(\varepsilon^{-1})$, $\mathcal{O}(\varepsilon^0)$ in the two-loop case – are denoted in form of a list (cf. sect 4.2.10).

For those two-loop topologies where no analytic result is known – like in the case of our example, the finite part contributes two entries to the output list. The first

of them is a list itself which denotes an integral representation, the second contains the part which is analytically calculable:

```
GF1 := [
C1 = [0, 0,

      8 4
      Mhiggs e
      [-----,
      8192      4 4 4
      sin(tw) Mw Pi

      2 2 2
      I Ln(Sqrt(x - ---- + I rho) + %1 + Sqrt(y - 2 y + 1 - ---- + I rho))
      q10 q10

      4 -----
      2
      q10 (- 2 x - 1) (- 2 y + 1)

      2
      - 4 I Ln(Sqrt(x + 2 x + 1 - ---- + I rho) + %1
      q10

      2 2
      + Sqrt(y - 2 y + 1 - ---- + I rho)) / (q10 (- 2 x - 1) (- 2 y + 1))
      q10

      2 2
      I Ln(Sqrt(x - ---- + I rho) + %1 + Sqrt(y - ---- + I rho))
      q10 q10

      - 4 ----- + 4
      2
      q10 (- 2 x - 1) (- 2 y + 1)

      2 2
      I Ln(Sqrt(x + 2 x + 1 - ---- + I rho) + %1 + Sqrt(y - ---- + I rho))
      q10 q10

      -----
      2
      q10 (- 2 x - 1) (- 2 y + 1)

      ,
x = - infinity .. infinity, y = - infinity .. infinity],
0],
C1]
```

$$\%1 := \sqrt{x^2 + 2xy + y^2 - \frac{M_{\text{higgs}}^2}{q_{10}^2} + i \rho}$$

In our example the result is finite, therefore the first two entries in the list are zero. The only nonvanishing contribution comes from the integral representation. A more detailed description of the integral representation is given in sect. 4.4.3.

The result is a function of the Higgs mass `Mhiggs` and the external momentum `q10`. The coupling of the vertices involve the W mass `Mw`, the Weinberg angle `tw` and the electromagnetic coupling constant `e`. `rho` denotes the infinitesimal imaginary part of the masses in the denominator (cf. sect. 4.2.10), `x` and `y` are the variables which have to be integrated out numerically.

- ▷ Click on the Eval. Numeric button: The integral representation described above is evaluated directly with the help of VEGAS. This option exists only for two-loop integrals, because all one-loop integrals are analytically calculable.

Please be aware that `χloops` can only perform the numerical integration if all variables – `Mhiggs` and `q10` in our example – are assigned with numerical values. For that purpose the menu File provides the **Insert Maple Command** entry. If this option is selected, a window (cf. fig. 3.3) appears, where any command can be passed directly to Maple. In our example we insert

```
q10:=91.17;
Mhiggs:=300;
```

to evaluate the integral on the Z resonance for an assumed value of 300 GeV for the Higgs mass. After clicking on Eval. Numeric `χloops` starts the numerical integration.

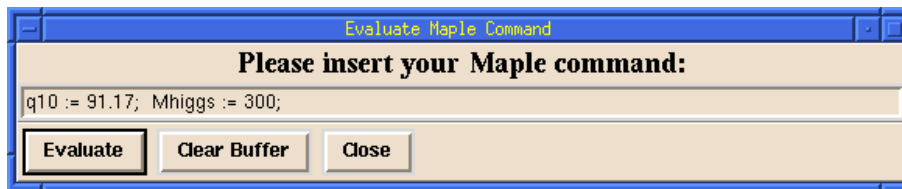


Figure 3.3: Direct Maple input of masses and momenta

The result including the numerical uncertainty appears in the *main window* and reads:

```
GM1 := [
C1 = [0, 0,
```

$$[.66598680119771701375 \cdot 10^{16} \frac{e^4}{\sin^4(tw) Mw^4},$$

$$[- .354349 \cdot 10^{-8} + .880157 \cdot 10^{-5} I, .13042 \cdot 10^{-7} + .148817 \cdot 10^{-7} I], 0],$$

c1]

In the result – compared to the **Eval. Full** option – the integral representation is now replaced by the numerical result of the integral. This result consists of a list: a pre-factor and another list. This list contains two entries: first the result of the VEGAS calculation, then the uncertainty VEGAS detected for this result (for details cf. sect. 4.2.10).

In our example the real part of the diagram is less than the numerical uncertainty, whereas the imaginary part is significantly larger. This means that the real part in fact is zero. Since we calculated the entire diagram which is not precisely Σ but $-i\Sigma$, this is what one expects below threshold.

Alternatively to the direct input of Maple commands described above it is possible to assign all known masses of particles, couplings and elements of the CKM matrix with the option Insert Particle Properties of the Options menu.

The input information for VEGAS can also be determined with the menu Options: Click on Numeric and an additional window will appear where the input parameters for VEGAS can be fixed (for details cf. sect. 4.1.4).


Finally the result can be saved in text mode to a file. Use in the menu File the entry Save Maple Output.

▷ Click on the **Close** button: The *diagram window* disappears.


The four buttons described above are completely independent. You can for example select **Eval. Numeric** without having clicked on **Evaluate** or **Eval. Full** before.

3.3 One-loop vertex correction

What follows is the calculation of a one-loop contribution of the correction to the eeZ vertex:

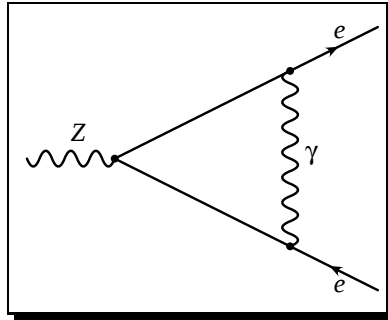

First one has to select the correct values in the menus **Loops** and **Ext. Lines** of the *main window* to get access to the one-loop three-point topologies. A click on the correct topology opens the *diagram window* (cf. fig. 3.4) where the particle names have to be inserted. Again the correct particle names can be found in sect. 4.2.4 or in the menu **Help**. The direction of the fermion line must be adjusted by clicking on the arrows. The flow of external momenta

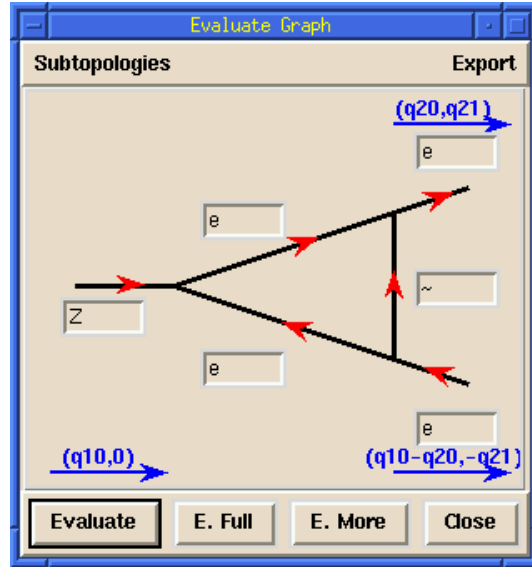Figure 3.4: The diagram for the eeZ one-loop vertex correction

is displayed in blue again. The three momenta are

$$\begin{aligned} \mathbf{q}_1 &= (q_{10}, 0, 0, 0) = (q_{10}, 0) \\ \mathbf{q}_2 &= (q_{20}, q_{21}, 0, 0) = (q_{20}, q_{21}) \\ \mathbf{q}_1 - \mathbf{q}_2 &= (q_{10} - q_{20}, -q_{21}, 0, 0) = (q_{10} - q_{20}, -q_{21}) \end{aligned}$$

where the vanishing orthogonal space components are not displayed in the window. q_{10}, q_{20}, q_{21} are the kinematical variables *χloops* uses for three-point functions. To get a numerical result, we assign these variables with

```
q10:=Mz0; q20:=Mz0/2; q21:=evalf(sqrt(Mz0^2/4-Melec^2));
```

using the option **Insert Maple Command** of the menu **File** so that all external particles are on-shell. Moreover the masses and couplings are assigned by the option **Insert Particle Properties** of the **Options** menu. The renormalization scale **MU** and the unit **GeV** can be omitted by setting

```
MU:=1; GeV:=1;
```

Clicking on the **E. Full** button gives the following result:

```
GF2 := [
  C1 = [.000010058632263504308717 I,
    - .00086276496443282788638 - .0072236143340212361270 I],
  C2 = [.00010510130634321490041 I,
    - .0090149159887518402249 - .075478582279918574719 I],
  C3 = [0, .00083116483915048522171 + .0071524795241752712917 I],
```

```

C4 = [0, .0086847304974275009526 + .074735304153769864092 I],

C5 = [0, .40863107990668029069*10-9 + .35164209243516742716*10-8 I],

C6 = [0, .000018229897665296319548 + .00015687498271956514041 I],

C7 = [0, .00019048176819004810260 + .0016391657617525244669 I],

C8 = [0, -.25407817700937862122*10-28 - .21701516787925566779*10-27 I],

C9 = [0, .000017536874322335126422 + .00015153965406412662322 I],

C10 = [0, .00018324045975332954356 + .0015834176245538375947 I],

C11 = [0, -.20431553995334014636*10-9 - .17582104621758371369*10-8 I],

C12 = [0, .22971899930888218199*10-8 + .19620932339352982103*10-7 I],

C13 = [-.24074590585723032270*10-25 I,

      .34651167097341202104*10-6 + .28882798115295165844*10-5 I],

C14 = [0, .36206542130597753444*10-5 + .000030179250351750043557 I],

C15 = [0, .12703908850468931061*10-28 + .10850758393962783388*10-27 I],

C16 = [0, .34651167090811890878*10-6 + .26676643227928772485*10-5 I],

C17 = [0, .36206542123775363980*10-5 + .000027874068547868333215 I],

C1 (1 &* Dg(nu1)) + C2 &*(1, Dg5, Dg(nu1)) + C3 &*(1, Dg0, Dg1, Dg(nu1))

+ C4 &*(1, Dg5, Dg0, Dg1, Dg(nu1)) + C5 (1 &* ONE) q2(nu1)

+ C6 (1 &* Dg0) q2(nu1) + C7 &*(1, Dg5, Dg0) q2(nu1)

+ C8 &*(1, Dg0, Dg1) q2(nu1) + C9 (1 &* Dg1) q2(nu1)

+ C10 &*(1, Dg5, Dg1) q2(nu1) + C11 (1 &* ONE) q1(nu1)

+ C12 (1 &* Dg5) q1(nu1) + C13 (1 &* Dg0) q1(nu1)

+ C14 &*(1, Dg5, Dg0) q1(nu1) + C15 &*(1, Dg0, Dg1) q1(nu1)

+ C16 (1 &* Dg1) q1(nu1) + C17 &*(1, Dg5, Dg1) q1(nu1) ]

```

The output is decomposed in several form factors C1, C2, ... to reflect the Dirac γ and Lorentz structure of the result. The last entry in this list is the defining equation for the form factors (cf. sect. 4.2.10).

4 Detailed description

There are two intentions covered by *χ loops*:

- ▷ Either the calculation of complete Feynman diagrams. Here you need the **Evaluate Graph** window (see sect. 4.1) where you can insert particles into a Feynman diagram. Alternatively you can use the **EvalGraph** procedures in **Maple** described in sect. 4.2.
- ▷ Or the solution of single integrals occurring in the calculation of one- and two-loop diagrams. Then you can make use of the **OneLoop** and **TwoLoop** procedures explained in sect. 4.3 and 4.4.


The creation of a library for the integrals follows in sect. 4.5. The numerical integration of two-loop integrals is explained in sect. 4.6.

4.1 The Xwindows interface

4.1.1 The functions of the menu bar

The *menu bar* provides a variety of different functions for the user. These functions are combined to groups which appear as menus if the user clicks on it. The list below gives a short overview. Additional descriptions can be found in the following sections.

- ▷ The menu **File** (cf. fig. 4.1a) has the following entries:
 - ▷ **Insert Maple Command** allows the insertion of an arbitrary command which is passed directly to **Maple** (cf. fig. 3.3). Especially the numerical input of masses, momenta and renormalization conditions can be done easily this way.
 - ▷ **Save Maple Output** saves the output as it is denoted in the **Maple text window** to an extra file. The name of the file has to be determined in a separate window, which appears if the user clicks on this entry.
 - ▷ **New Process** allows the user to collect a set of graphs and save them with a common process name. Detailed explanation can be found in section 4.1.3.
 - ▷ **With Load Process** processes which were declared with **New Process** before can be reloaded into the current *χ loops* session (cf. sect. 4.1.3).
 - ▷ **Create Process** will call the graph generator to produce all graphs to a given number of loops and external lines in a pre-defined model (in future versions of *χ loops* only).
 - ▷ **Restart Maple** terminates the current **Maple** session and removes all assigned variables. **Maple** and *χ loops* are started again.
 - ▷ **Quit** terminates *χ loops*.

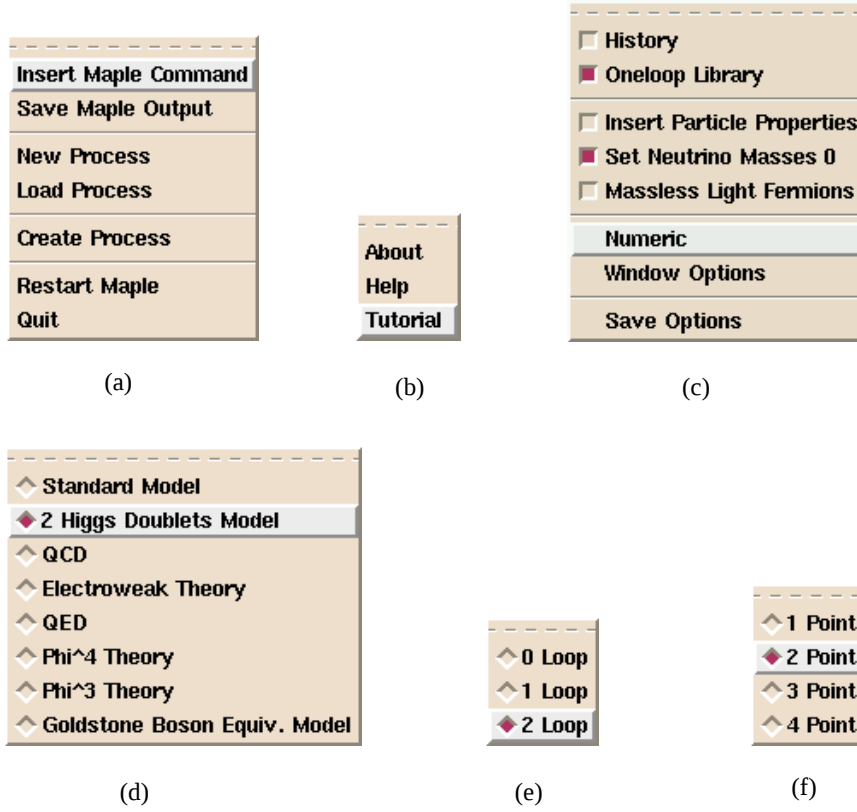Figure 4.1: The menus of the *menu bar*

- ▷ The menu Model (cf. fig. 4.1d) offers several physical models for calculation (for details cf. sect. 4.2.3).
- ▷ The menu Loops (cf. fig. 4.1e) selects the number of closed loops for the calculation. The user can choose between 0, 1 and 2. A change of this value results in different topologies displayed in the *topology bar*.
- ▷ The menu Ext. Lines (cf. fig. 4.1f) allows the user to choose the number of external lines. At the moment the upper limit is three. The change of this number results in a different *topology bar* as well.
- ▷ The menu Options (cf. fig. 4.1c) contains the following entries:
 - ▷ If History is selected $\chi loops$ saves all calculations under a common process name. Those diagrams which were already saved before are read from disk. Otherwise, if History is not selected they are recalculated (cf. sect. 4.1.3).
 - ▷ With the selection of Oneloop Library $\chi loops$ takes all one-loop functions from a pre-built library. Otherwise the one-loop functions are calculated every time they are needed (cf. sect. 4.5 and appendix B.2).
 - ▷ If Insert Particle Properties is selected the values of masses and couplings reported by the Particle Data Group [11] are inserted (cf. sect. 4.2.4).
 - ▷ Set Neutrino Masses 0 assigns all neutrino masses to zero (default) or, if not selected, leaves the neutrino masses unassigned. In this case an undefined neutrino mixing matrix exists as well (cf. sect. 4.2.4).

- ▷ **Massless Light Fermions** assigns the masses of all fermions except the b and t quark to zero (cf. sect. 4.2.4).
 - ▷ **Numeric** defines the number of points and the number of iterations for the numerical integration with **VEGAS** (cf. sect. 4.6).
 - ▷ **Window Options** allows the user to adjust the appearance of the **Xwindows** interface, especially the placement of the red arrows of the *diagram window* (cf. sect. 4.1.4).
 - ▷ **Save Options** saves all options in the file `.xloops` in the home directory of the user.
- ▷ The menu **Help** (cf. fig. 4.1b) has three entries:
- ▷ **About** shows a brief information on *xloops*.
 - ▷ **Help** gives a short help where especially the notation of all particle names in *xloops* is written.
 - ▷ **Tutorial** calls a WWW browser which displays the on-line html version of this manual.

4.1.2 Topology bar and diagram window


According to the pre-defined values for the numbers of closed loops and external lines the *topology bar* displays all possible topologies. If the user clicks on one of them this topology appears in a separate window, the *diagram window*. This window consists of three parts: a *menu bar*, an area for inserting particles (*diagram area*) and a *command bar* with different buttons for evaluation (cf. fig. 4.2).

The *menu bar* provides two options. The right one, **Export**, gives the user the possibility to export the graph to a Postscript file. Only the *diagram area* of the *diagram window* is exported, *menu bar* and *command bar* are not included.

The left option, **Subtopologies**, will only be available in future versions. It will provide the possibility to switch between several subtopologies, which are obtained when external lines are interchanged. The upper topology in fig. 4.2 may serve as an example. This topology can be rotated by 120° or 240° which corresponds to a cyclic permutation of the external lines. This changes the topology to the same type of topology but with different momentum flow. In contrast, the lower topology in fig. 4.2 does not change if it is rotated by 120° or 240° . So this topology does not exhibit different subtopologies.

In the *diagram area* the topology is displayed graphically. For every propagator an entry for the insertion of particles is located. The correct terms for particle names are written in section 4.2.4. They can also be obtained from the **Help** function of the *main window*. The flow of charge and fermion and ghost numbers are determined by the red arrows on the propagator lines. Clicking on an arrow changes its direction. The correct flow of charge and fermion and ghost numbers can be settled in this way. Only particles, no antiparticles can be inserted. Charge conjugation may be achieved by inversion of arrows. Please keep in mind that the arrows don't describe the direction of momenta. The convention of momentum flow is shown graphically in the *diagram window* in blue. It is defined for all diagrams in the same way, to facilitate a final summation of all calculated diagrams.

If the user has inserted all particles and checked the charge flow, the *command area* gives him several possibilities for the evaluation of the diagram. They correspond to the different modes of evaluation as explained in section 4.2.10.

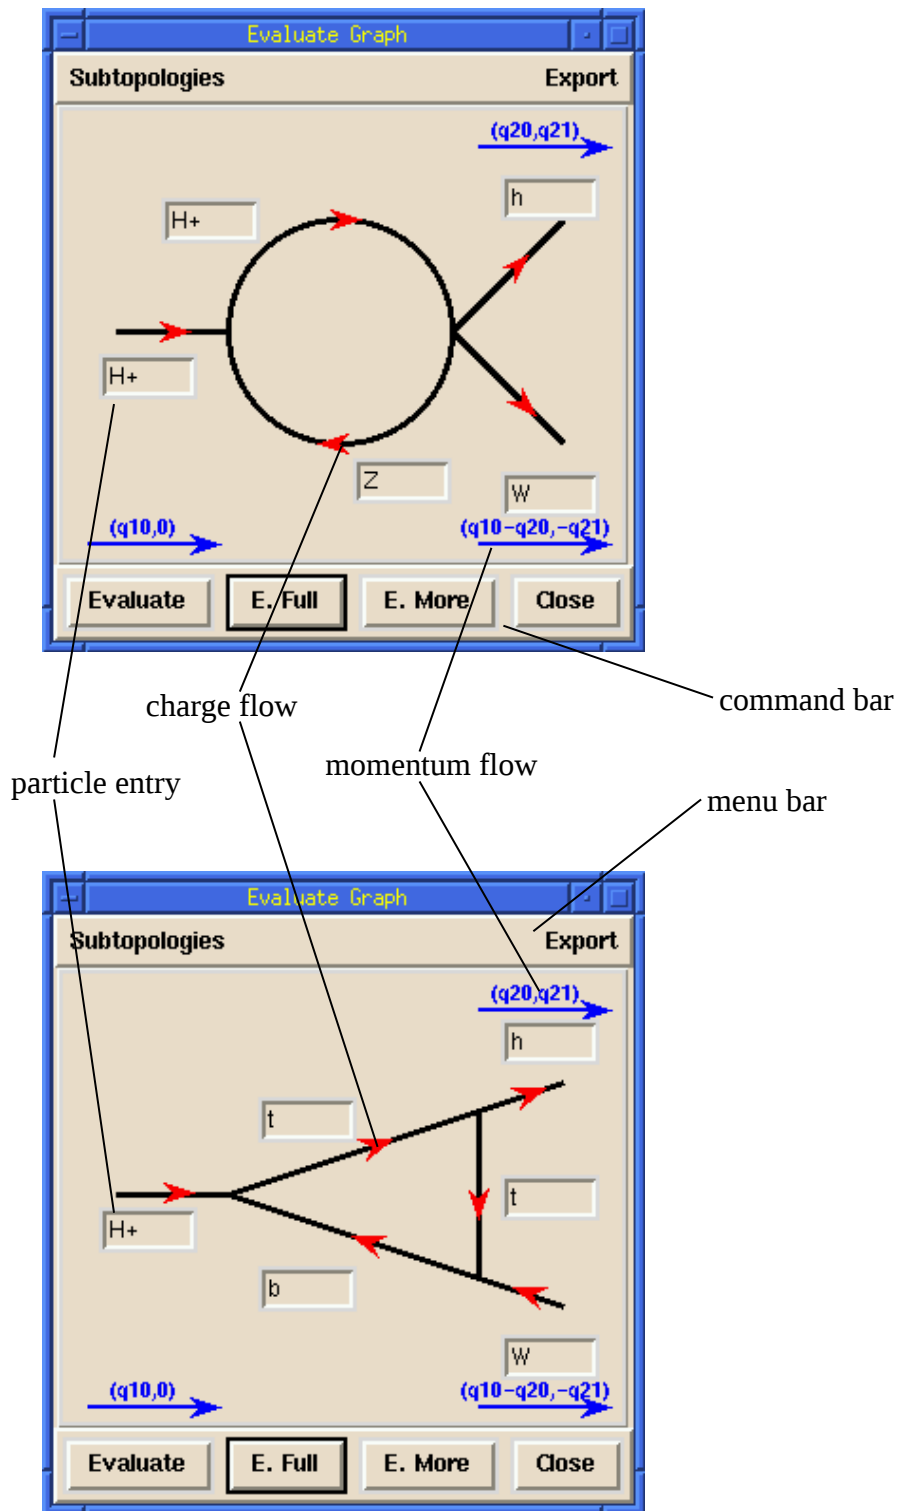Figure 4.2: Different *diagram windows*

4.1.3 Loading and saving of processes

For the evaluation of complete processes it is possible to save the contributing graphs with a common process name. Therefore χ loops provides the File menu entries Load Process and New Process.

If Load Process is selected the *file window* (cf. fig. 4.3) appears on the screen. In this

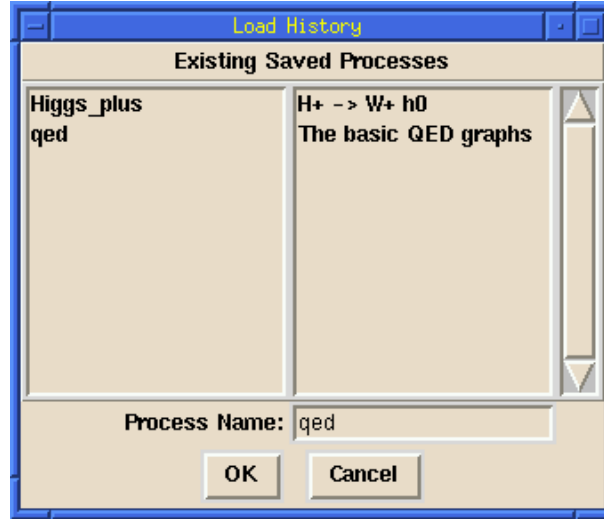


Figure 4.3: The Load Process *file window*

window the processes which were already saved are listed on the left hand side. In addition for every process a user specified description is given on the right hand side. This may help to reidentify a process later. To select a specific process one clicks on a process name on the left. After clicking on the **OK** button the *history table* (cf. fig 4.4) of the selected process appears whereas **Cancel** closes the *file window*. In the *history table* all diagrams which were included in the corresponding process occur with a button. A click on such a button opens a *diagram window* (cf. fig 4.2) with which the Feynman diagram can be evaluated. The *history table* contains two menus:

- ▷ In **Graphs** one has the opportunity – if the number of diagrams exceeds the capacity of the window – to switch to another sheet of diagrams. The same effect have the arrows at the bottom of the *history table*.
- ▷ **Close** lets the *history table* disappear.

If the entry **History** of the **Options** menu is selected all results are saved. With **History** all calculations which were already saved in this or another χ loops session are read in automatically and not calculated again. For each process χ loops automatically creates a subdirectory of the directory **xloops_user** where the results are saved to different files.

If **History** is selected without having specified a process before χ loops assumes that a new process shall be added to the list and opens a similar *file window* (cf. fig 4.5) – the same window appears if **New Process** is selected. Two entries are provided for inserting a new process name and description at the bottom of the window. After the user inserted the name and description for his process and clicked on the **OK** button a new – and therefore empty – *history table* appears on the screen. All diagrams which are calculated from now are included in the *history table* as additional entries. The topology of the graph and the list of interacting particles are displayed.

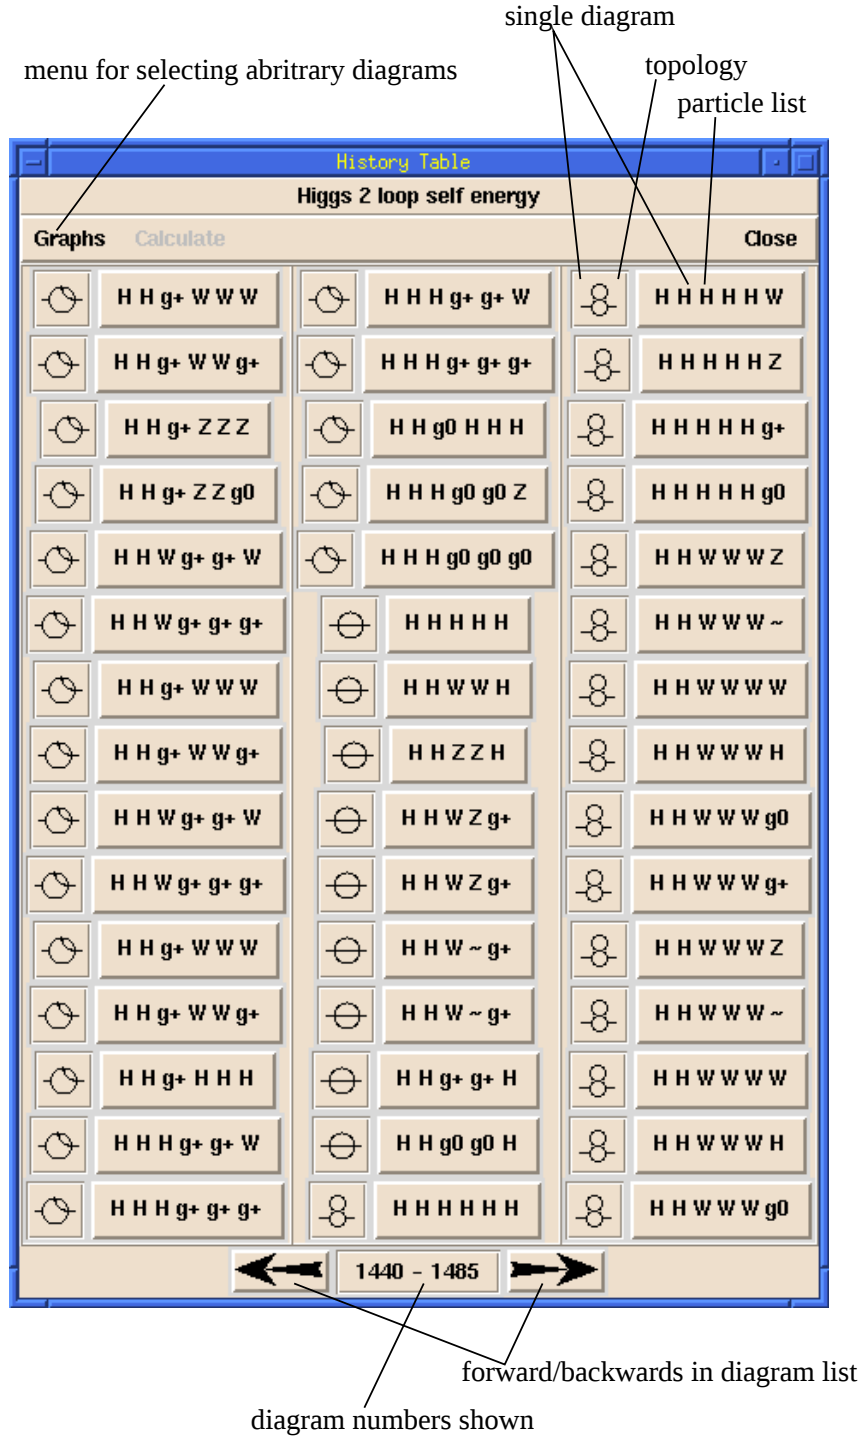
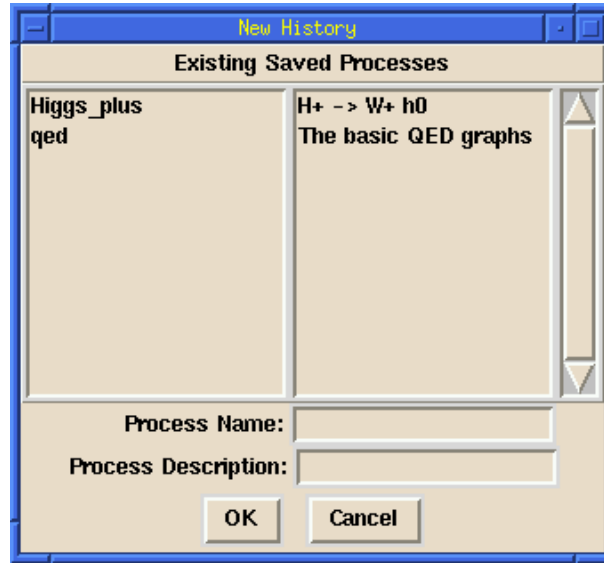
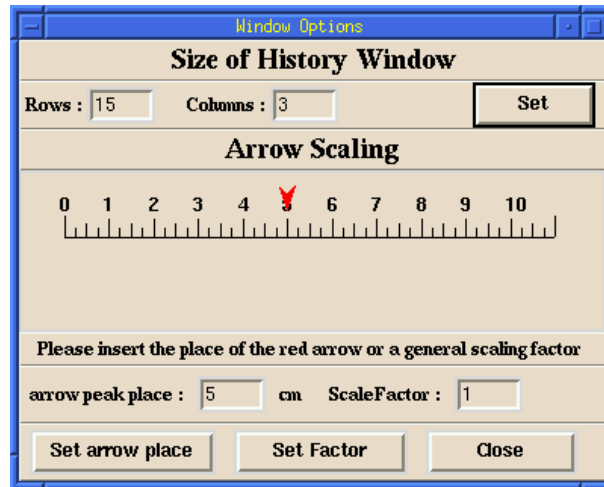


Figure 4.4: The *history table* containing diagrams of the process $H \rightarrow H$

Figure 4.5: The New Process *file window*

4.1.4 Window options

With the entry Window Options of the Options menu the appearance of some windows of χ loops can be adjusted to fit the terminal characteristics (cf. fig. 4.6). First, the size of the

Figure 4.6: Window options of χ loops

history table (cf. fig. 4.4) can be changed by decreasing or increasing the numbers of the Rows and Columns entry in fig. 4.6. Then, the position of the arrows of the propagators in the *diagram window* can be corrected. This might be necessary on some terminal types, where the arrows of the propagators are misplaced. This has to do with the fact that the relation between screen dots (as used by Tk) and centimeters is different on different X terminals. The embarrassing consequence can be that the arrows of the propagators are misplaced. The problem can be avoided by inserting a global Scale Factor. Alternatively, if this factor is not obvious, χ loops will calculate it. Therefore the user must insert the

position of the arrow on the ruler in the **Arrow Scaling** field of fig. 4.6.¹

4.2 Evaluation of Feynman diagrams

4.2.1 Input

To evaluate a particular Feynman diagram *xloops* needs to know four ingredients:

1. The number of closed loops.
2. The number of external lines.
3. The topology, that means the information how the lines of the diagram are connected.
4. The particles of the diagram.

The first two numbers have to be selected with the help of the *menu bar* entries **Loops** and **Ext. Lines** (cf. sect. 4.1.1). Then the topology can be selected on the *topology bar* so that the *diagram window* pops up where the particles can be inserted (cf. sect. 4.1.2).

Internally the input from the **Xwindows** interface is converted to a procedure which performs the calculations in **Maple**. It is also possible to start directly from this routine for **Maple** – either with the **Insert Maple Command** of the **File** menu or within an ordinary **Maple** session where the **Maple** part of *xloops* was read in before (cf. sect. 2.5).

For that purpose the internal **Maple** commands will be mentioned in the following. All commands which follow without reference to the **Xwindows** interface have to be passed to **Maple**.

The input is then of the following form

- ▷ for tree diagrams: `EvalGraph0(n,⟨list⟩);`
- ▷ for one-loop diagrams: `EvalGraph1(n,⟨list⟩);`
- ▷ for two-loop diagrams: `EvalGraph2(n,⟨list⟩);`

The different topologies with the same number of loops are numbered. The number of the desired topology has to be inserted in the function call for *n*. The correct number for each topology will be given below in sect. 4.2.2. ⟨*list*⟩ describes the list of particles involved in the Feynman diagram. The conventions for the ordering of the particles are also explained for every topology in 4.2.2.

4.2.2 Internal Notation

What follows is a list of all topologies which at present can be solved by *xloops*. This list is only of interest for direct **Maple** input. To fix the flow of charges and of fermion or ghost numbers in a unique way, each internal propagator is assigned with two particle names. For example `[up,upbar]` and `[upbar,up]` describe the up-quark propagator but with different direction of the quark line arrow. External lines are described by only one particle name.


As a convention all particles at each vertex are incoming. The arrows of the diagrams displayed below only describe the flow of momenta. Of course these arrows need not to coincide with the arrows of fermions or other charged particles.

For each topology we give the correct **EvalGraph** command as well as the command for the corresponding **OneLoop** or **TwoLoop** integral.


¹If the scaling factor is already correct, the arrow should point on the 5.



Tree level

Three-point diagrams

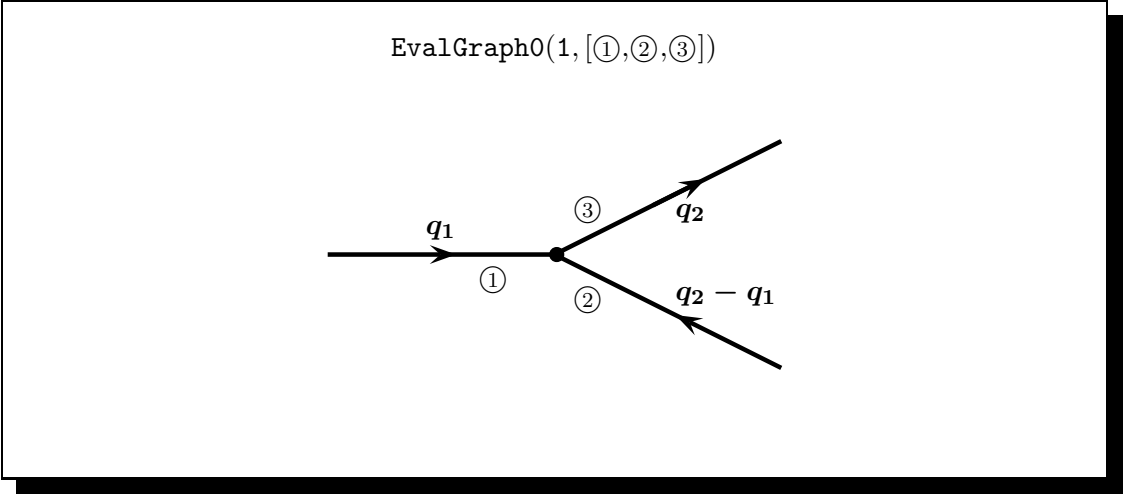


Four-point diagrams

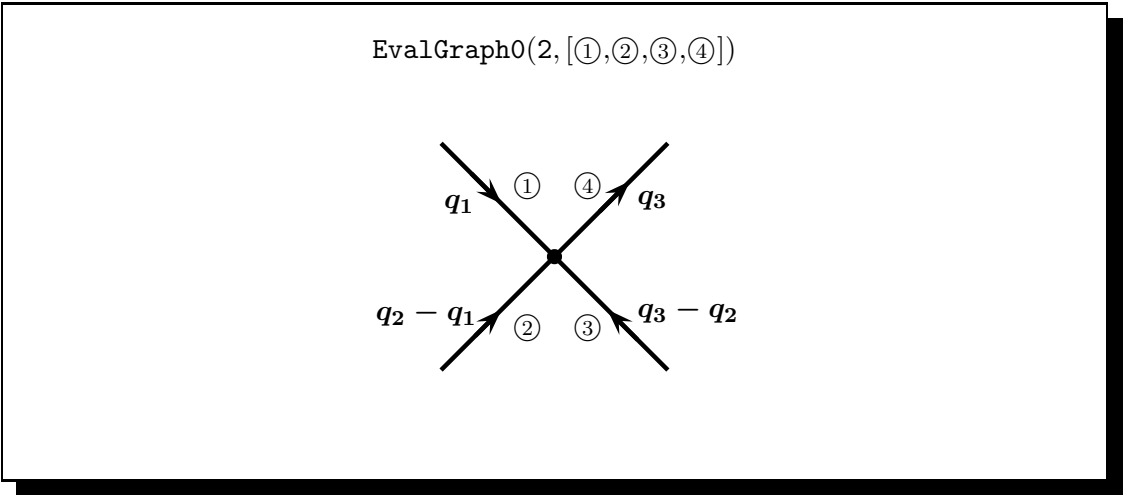

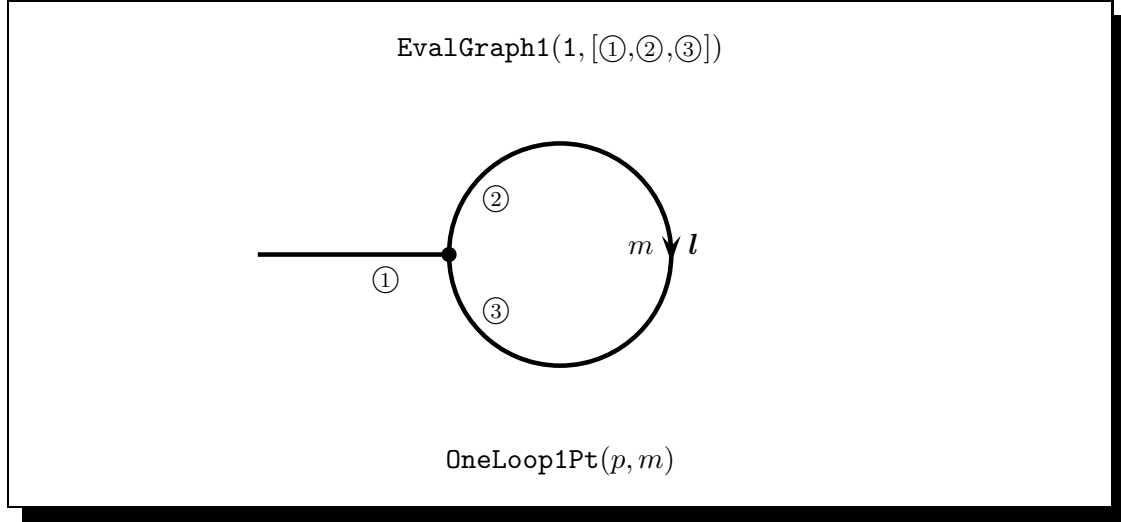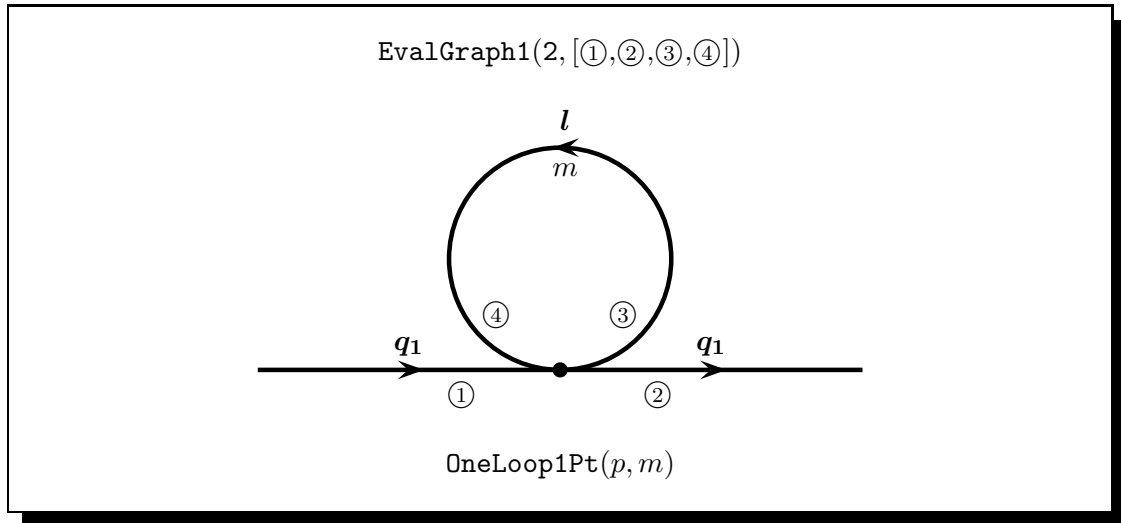*One-loop level**One-point diagrams**Two-point diagrams*


EvalGraph1(3, [①, ②, ③, ④, ⑤, ⑥])

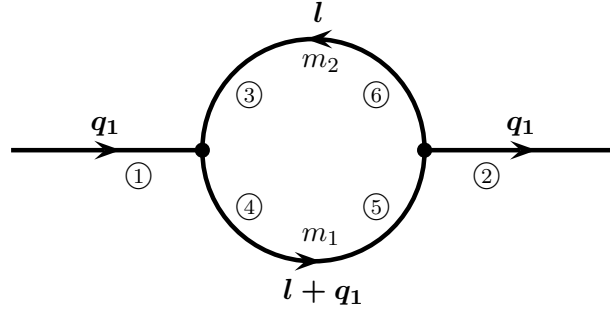

OneLoop2Pt($p_0, p_\perp, q_{10}, m_1, m_2$)


Three-point diagrams

EvalGraph1(4, [①, ②, ③, ④, ⑤, ⑥, ⑦])


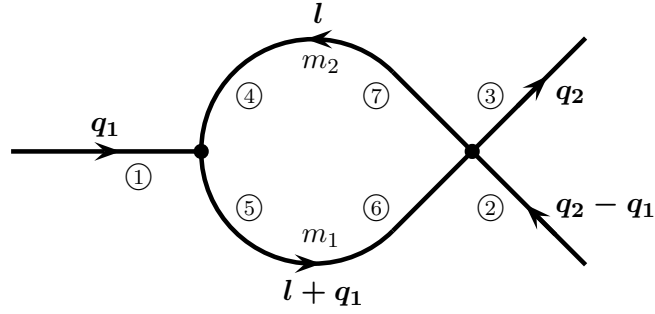


OneLoop2Pt($p_0, p_\perp, q_{10}, m_1, m_2$)


EvalGraph1(5, [①, ②, ③, ④, ⑤, ⑥, ⑦, ⑧, ⑨])

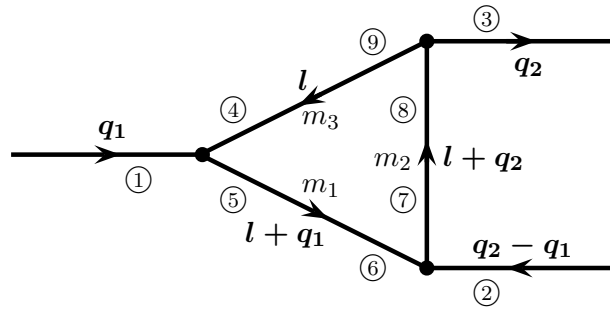

OneLoop3Pt($p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3$)

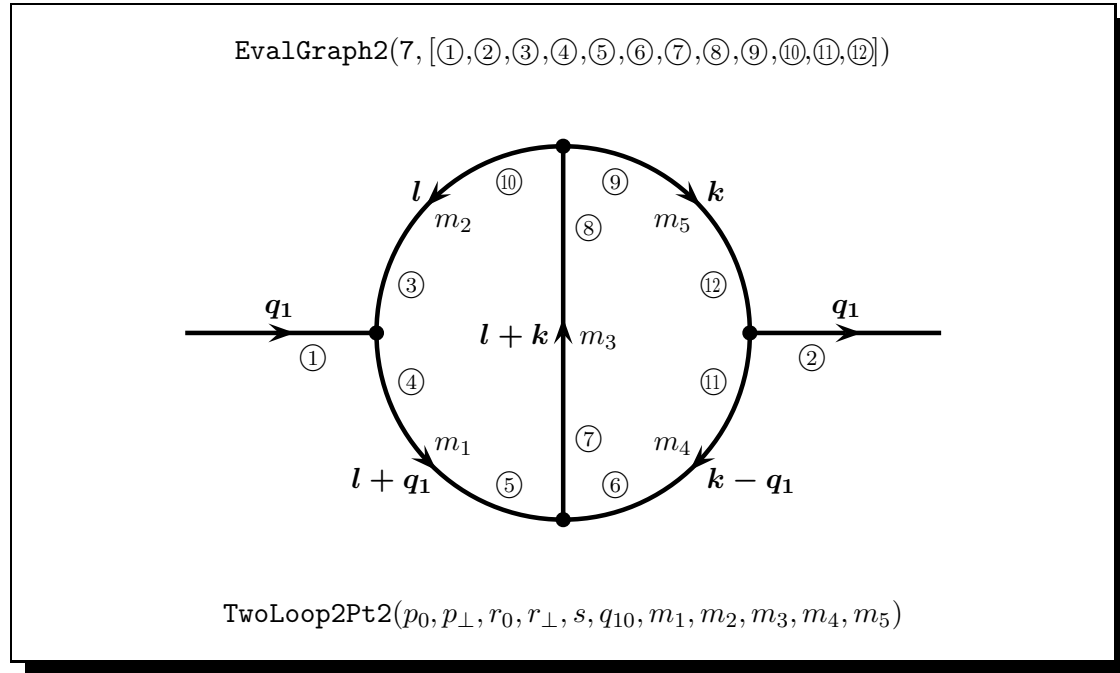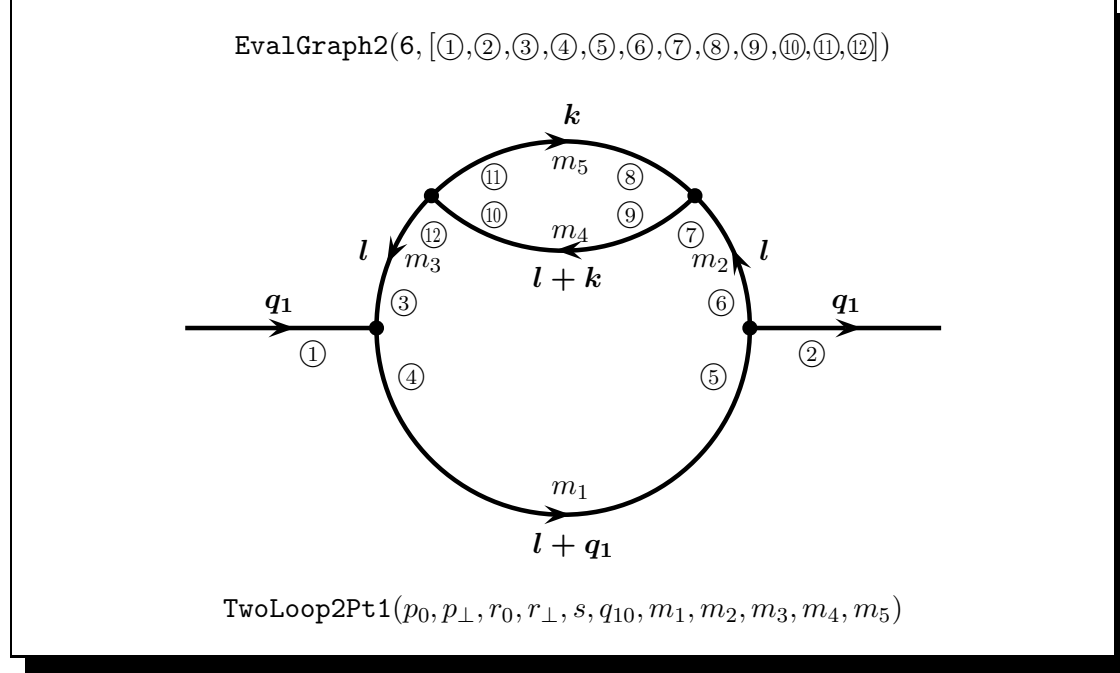
Two-loop level**Two-point diagrams**

EvalGraph2(8, [①,②,③,④,⑤,⑥,⑦,⑧,⑨,⑩])


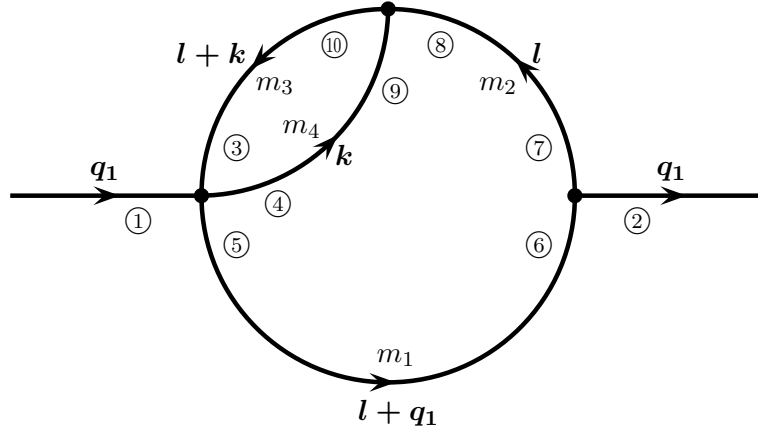


TwoLoop2Pt3($p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4$)

EvalGraph2(9, [①,②,③,④,⑤,⑥,⑦,⑧])

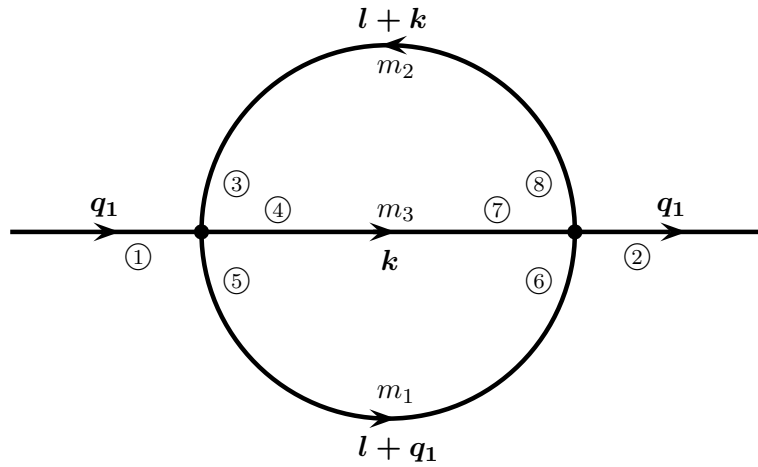

TwoLoop2Pt4($p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3$)

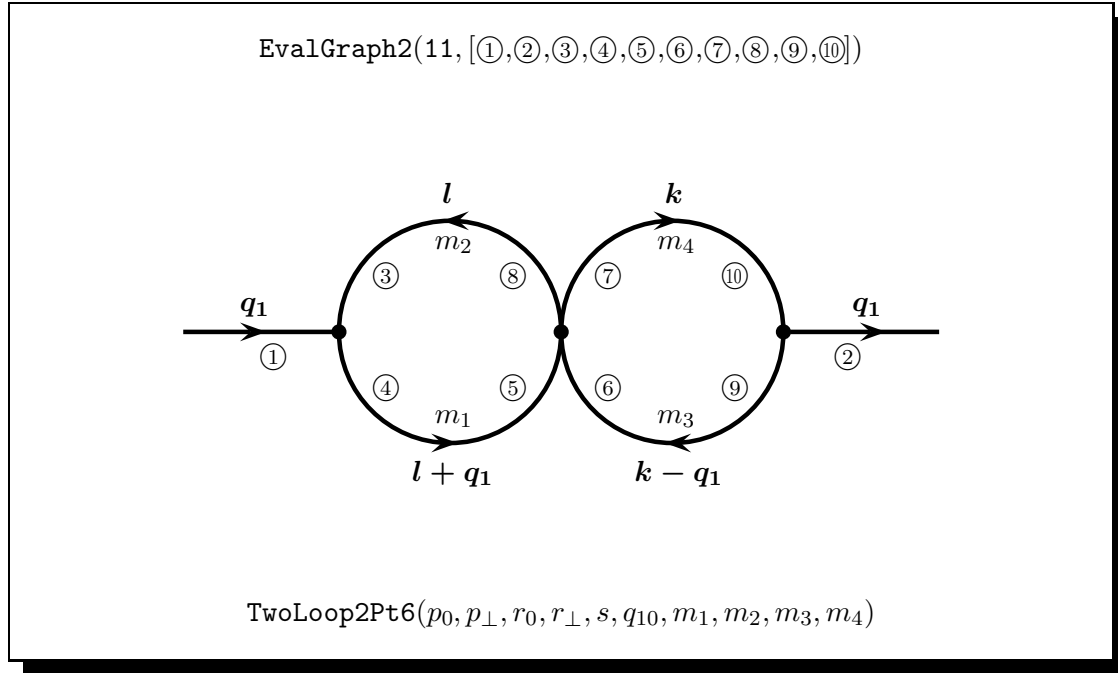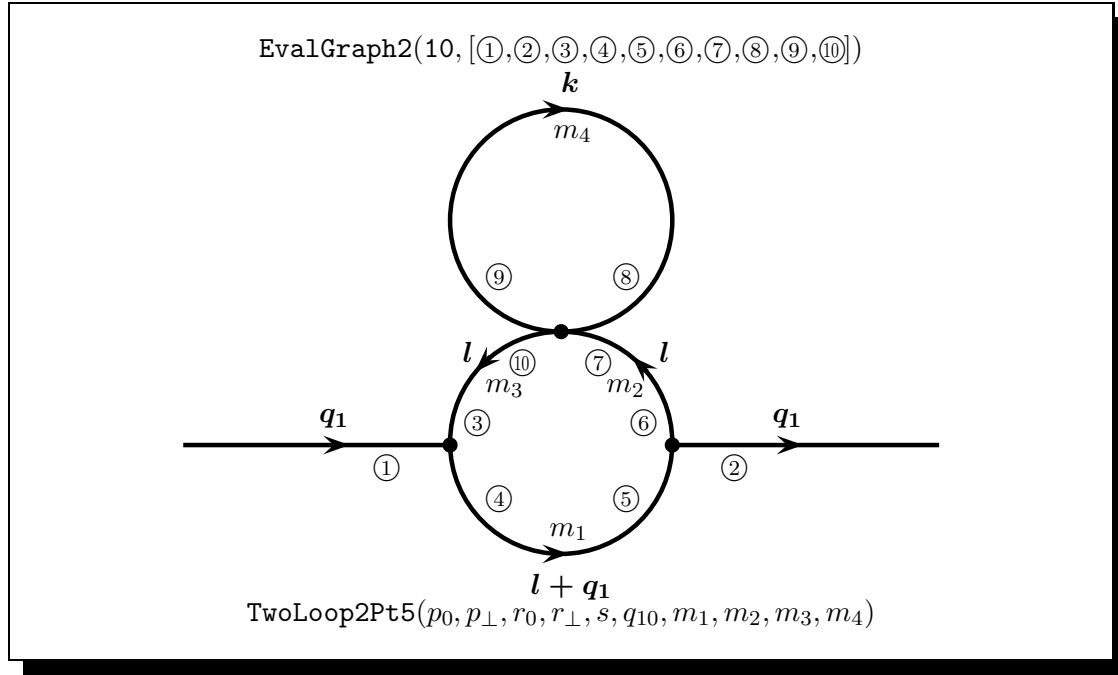

For each encircled number one particle has to be inserted. The correct symbols for all allowed particles are listed in the next section. The conventions for the `OneLoop` and `TwoLoop` functions are denoted in sect. 4.3 and 4.4.

4.2.3 Models

`χloops` distinguishes several models. The menu `Model` of the *menu bar* serves for the selection of the desired model. Internally the global variable `Model` selects the model which shall be used. The following models are declared in `χloops`:







- ▷ **Standard Model** – the (minimal) standard model (electroweak and QCD). This corresponds to `Model:=SM`; and is the default value
- ▷ **2 Higgs Doublets Model** – the standard model with two Higgs doublets which corresponds to five physical Higgs particles; `Model:=THDM`;
- ▷ **QCD** – QCD with three generations of Quarks; `Model:=QCD`;
- ▷ **Electroweak Theory** – the electroweak sector of the standard model; `Model:=EW`;
- ▷ **QED** – QED with three generations of Leptons and Quarks; `Model:=QED`;
- ▷ **Phi⁴ Theory** – ϕ^4 -theory in four dimensions; `Model:=phifour`;
- ▷ **Phi³ Theory** – ϕ^3 -theory in four dimensions; `Model:=phithree`;
- ▷ **Goldstone Boson Equiv. Model** – the equivalence model for Goldstone bosons – standard model vector bosons are replaced by scalar Goldstone modes [12–14]; `Model:=GBEM`;
- ▷ a user-defined model where arbitrary Feynman rules can be declared. To work with this option the user has to set `Model:=user`; and to read an additional file






```
read('⟨path⟩fmuser.ma');
```






where $\langle path \rangle$ is the same path used for the assignment of `LoopPath` at the beginning of the **Maple** session (cf. sect. 2.5). In the file `fmuser.ma` the user-defined rules have to be inserted. Initially all QCD Feynman rules are denoted there as an example. The conventions of declaration can be taken from this example.








4.2.4 Particles and Masses

What follows is a list which contains all particles $\chi loops$ knows. The names valid in the **Xwindows** interface are denoted (second column from the left) as well as the names for internal use within **Maple** (third column from the left). In addition for each particle the models in which it is declared (right column) and the name which $\chi loops$ uses for the corresponding particle mass (second column from the right) are listed.

	f, phi	① = phi ② = phi	$m_\phi = M\text{phi}$	phithree, phifour
	ve, nuelec	① = nuelec ② = nuelecbar	$m_{\nu_e} = M\text{nuelec}$	SM, EW, QED, THDM, GBEM
	e, elec	① = elec ② = elecbar	$m_e = M\text{elec}$	SM, EW, QED, THDM, GBEM
	$\nu\mu$, numu	① = numu ② = numubar	$m_{\nu_\mu} = M\text{numu}$	SM, EW, QED, THDM, GBEM
	μ , mu	① = mu ② = mubar	$m_\mu = M\text{mu}$	SM, EW, QED, THDM, GBEM
	$\nu\tau$, nutau	① = nutau ② = nutaubar	$m_{\nu_\tau} = M\text{nutau}$	SM, EW, QED, THDM, GBEM
	τ , tau	① = tau ② = taubar	$m_\tau = M\text{tau}$	SM, EW, QED, THDM, GBEM
	u, up	① = up ② = upbar	$m_u = M\text{up}$	SM, EW, QED, QCD, THDM, GBEM

	d, down	① = down ② = downbar	$m_d = M_{\text{down}}$	SM, EW, QED, QCD, THDM, GBEM
	c, charm	① = charm ② = charmbar	$m_c = M_{\text{charm}}$	SM, EW, QED, QCD, THDM, GBEM
	s, strange	① = strange ② = strangebar	$m_s = M_{\text{strange}}$	SM, EW, QED, QCD, THDM, GBEM
	t, top	① = top ② = topbar	$m_t = M_{\text{top}}$	SM, EW, QED, QCD, THDM, GBEM
	b, bottom	① = bottom ② = bottombar	$m_b = M_{\text{bottom}}$	SM, EW, QED, QCD, THDM, GBEM
	γ , gamma	① = gamma ② = gamma	$m_\gamma = M_{\text{gamma}} = 0$	SM, EW, QED, THDM, GBEM
	W, wp	① = wp ② = wm	$m_W = M_W$	SM, EW, THDM, GBEM
	Z, z0	① = z0 ② = z0	$m_Z = M_{z0}$	SM, EW, THDM, GBEM

	g, gluon	① = gluon ② = gluon	$m_g = M_{\text{gluon}} = 0$	SM, QCD, THDM
	H, higgs	① = higgs ② = higgs	$m_H = M_{\text{higgs}}$	SM, EW, GBEM
	g+, goldp	① = goldp ② = goldm	—	SM, EW, THDM
	g0, gold0	① = gold0 ② = gold0	—	SM, EW, THDM
	H, Higgs0	① = Higgs0 ② = Higgs0	$m_{H_0} = M_{\text{Higgs0}}$	THDM
	h, higgs0	① = higgs0 ② = higgs0	$m_{h_0} = M_{\text{higgs0}}$	THDM

	H ⁺ , Higgs ^p	① = Higgs ^p ② = Higgs ^m	$m_H = M_{\text{Higgs}}$	THDM
	A ₀ , a ₀	① = a ₀ ② = a ₀	$m_{A_0} = M_{a_0}$	THDM
	G [~] , ghostgluon	① = ghostgluon ② = ghostgluonbar	—	SM, EW, THDM
	GZ, ghostz ₀	① = ghostz ₀ ② = ghostz ₀ bar	—	SM, EW, THDM
	GW ⁺ , ghostw ^p	① = ghostw ^p ② = ghostw ^m bar	—	SM, EW, THDM
	GW ⁻ , ghostw ^m	① = ghostw ^m ② = ghostw ^p bar	—	SM, EW, THDM
	Gg, ghostgluon	① = ghostgluon ② = ghostgluonbar	—	SM, QCD, THDM

Please note that the masses of the neutrinos are set to zero by default. To keep them as variables, one can switch off the entry **Set Neutrino Mass 0** of the **Options** menu or use

```
UnsetNeutrinoMass0();
```

within **Maple** which removes any assignment of **Mnuelec**, **Mnumu** and **Mnutau**. As a consequence now a leptonic CKM matrix exists which behaves analogous to the usual CKM matrix of quarks (cf. sect. 4.2.6). The reverse command

```
SetNeutrinoMass0();
```

or the reselection of **Set Neutrino Mass 0** sets all neutrino masses back to zero. The leptonic CKM matrix equals now the unit matrix.

The masses of photon and gluon are also set to zero by default. To keep them as variables you have to type

```
Mgamma:='Mgamma'; Mgluon:='Mgluon';
```

The masses of leptons and light quarks – all standard model fermions except *b* and *t* quark – can collectively be set to zero with the entry **Massless Light Fermions** of the **Options** menu or with

```
SetLightMass0();
```

and be unassigned with

```
UnsetLightMass0();
```

or another click on **Massless Light Fermions**. Apart from this, masses, momenta and couplings – as they are explained in the following sections – can be assigned by the user.

Moreover, if you want to assign all particle masses² as well as the couplings, the Cabibbo-Kobayashi-Maskawa matrix (CKM matrix) and the Weinberg angle with their experimentally determined values, you can use the entry **Insert Particle Properties** of the **Options** menu or type

```
read'⟨path⟩values.ma';
```

where *⟨path⟩* is the same path used for the assignment of **LoopPath** at the beginning of the **Maple** session (cf. sect. 2.5). The file **values.ma** contains the parameters according to the currently published data of the Particle Data Group [11]. To remove all information of **values.ma** in a **Maple** session you can type

```
read'⟨path⟩unvalue.ma';
```

or switch off the **Insert Particle Properties** entry. Instead of the fermion names which were already introduced one can also use the more general terms

up1, up2, up3, down1, down2, down3.

The difference is, that for these terms no electric charge **Q** and no weak isospin **T3l** is

²Unfortunately the Higgs mass is not yet included

defined. While $\chi loops$ assumes

$$Q(\text{elec}) = -1; \quad T31(\text{elec}) = -\frac{1}{2}; \quad Q(\text{up}) = \frac{2}{3}; \quad T31(\text{up}) = \frac{1}{2}; \quad \dots$$

it has no values for $Q(\text{up1})$, $T31(\text{up1})$, ... and the user has the opportunity to make use of this freedom.

4.2.5 Feynman rules

Since the conventions for Feynman rules vary in the literature, it is important to explain one's own rules: We use Feynman gauge, for electroweak processes according to the rules given in [15], but with all three-vertices and all propagators multiplied by $-i$ and all four-vertices and the integration measure multiplied by i . This convention coincides with the rules of [16] – as far as these are applicable in Feynman gauge. From [16] we took the rules for QCD and the notation of the CKM matrix, too. The rules for the Two Higgs doublet model are from [17].

Anyway, you receive the rule for one particular vertex easily if you just use the tree level topologies or call the `EvalGraph0` procedure.

In our convention the electromagnetic coupling **e** and the strong coupling **gs** are positive (the electric charge of the electron is $-\mathbf{e}$). $\chi loops$ automatically inserts a factor $(2\pi)^{2\varepsilon-4}$ for every closed loop and an additional -1 for each fermion and ghost loop. This means that the dimension – which $\chi loops$ calls **D** – equals $4 - 2 \mathbf{eps}$. The correct symmetry factor of the diagram is also included. The scale which keeps the coupling constants dimensionless is called **MU**.

4.2.6 Mixing angles and CKM matrix

Three mixing angles are known by $\chi loops$: The usual Weinberg angle **tw** and – only relevant in the case of the Two Higgs doublet model – the angles **alpha** and **beta** (cf. [17]). The elements of the CKM matrix are denoted by $\text{CKM}(\text{up}, \text{down})$..., its complex conjugates are $\text{CKMC}(\text{up}, \text{down})$ If neutrino masses are not set equal to zero there exists also a leptonic CKM matrix with elements like $\text{CKM}(\text{nuelec}, \text{elec})$. If the neutrino masses are set to zero – which is the default (cf. sect. 4.2.4) – this matrix equals the unit matrix.

4.2.7 Momenta and Metric

The external momenta $q1(\text{nu1})$, $q2(\text{nu1})$, ... may occur in two different contexts,

1. as Lorentz vectors $q1(\text{nu1})$, ... with Lorentz indices **nu1**, ... ,
2. contracted with another Lorentz vector.

In the first case the momentum will appear in the output as it is. In the second case the contraction will be written in terms of parallel space components:

$$\begin{aligned} q_{10} &= \sqrt{q_1^2}; & q_{20} &= \frac{\mathbf{q}_1 \cdot \mathbf{q}_2}{\sqrt{q_1^2}}; & q_{21} &= \sqrt{\frac{(\mathbf{q}_1 \cdot \mathbf{q}_2)^2}{q_1^2} - q_2^2}; \\ q_{30} &= \frac{\mathbf{q}_1 \cdot \mathbf{q}_3}{\sqrt{q_1^2}}; & q_{31} &= -\frac{\hat{\mathbf{q}}_2 \cdot \mathbf{q}_3}{\sqrt{-\hat{\mathbf{q}}_2^2}}; & q_{32} &= \sqrt{\frac{(\mathbf{q}_1 \cdot \mathbf{q}_3)^2}{q_1^2} + \frac{(\hat{\mathbf{q}}_2 \cdot \mathbf{q}_3)^2}{\hat{\mathbf{q}}_2^2} - q_3^2}, \end{aligned} \tag{4.1}$$

where the auxiliary property

$$\hat{\mathbf{q}}_2 = \mathbf{q}_2 - \frac{\mathbf{q}_1 \cdot \mathbf{q}_2}{q_1^2} \mathbf{q}_1 \tag{4.2}$$

was used. In appendix A we demonstrate how this works in practice.

The metric tensor of χ_{loops} is $G(\text{nu1}, \text{nu2})$. It obeys the usual conventions

$$G(0,0) = 1; \quad G(1,1) = -1 \quad \dots$$

The contraction of $G(\text{nu1}, \text{nu2})$ depends on whether the indices nu1 and nu2 are orthogonal space indices – then $G(\text{nu1}, \text{nu1}) = D - \text{DimP}$ – or belong to the entire Minkowski space – this means that $G(\text{nu1}, \text{nu1}) = D$.

The totally antisymmetric tensor is $Eps(\text{nu1}, \text{nu2}, \text{nu3}, \text{nu4})$ with $Eps(0,1,2,3) = 1$.

4.2.8 Dirac matrices

Dirac γ -matrices χ_{loops} calls $Dg(\text{mu1}), \dots$. Like the external momenta they can appear either as Lorentz vector as they are, or contracted by another Lorentz vector. In the latter case they are denoted by

$$Dg0 = \frac{\not{q}_1}{\sqrt{q_1^2}}; \quad Dg1 = -\frac{\not{q}_2}{\sqrt{-q_2^2}}; \quad Dg2 = -\frac{\not{q}_3}{\sqrt{-q_3^2}} \quad (4.3)$$

with

$$\hat{q}_3 = q_3 - \frac{q_1 \cdot q_3}{q_1^2} q_1 - \frac{\hat{q}_2 \cdot q_3}{\hat{q}_2^2} \hat{q}_2 \quad (4.4)$$

and the abbreviation (4.2). The Dirac structure is written as a string of the non-commutative product $\&*$. Since the program is also designed for diagrams with more than one fermion line it labels each string of Dirac matrices with a number. For example in the case of fermionic self-energies

$$\&*(1, \text{ONE}); \quad \&*(1, Dg0); \quad \&*(1, Dg5); \quad \&*(1, Dg5, Dg0)$$

will occur in the output – the latter two of course only in the case of W, Z or Goldstone boson exchange. ONE represents the identity of the Clifford algebra, $Dg5$ is γ_5 . The first entry in the non-commutative string gives the number of the fermion line. The 1 means that the string belongs to the first fermion line which in this case is the only fermion line. In appendix A this treatment can be seen in practice.

4.2.9 $SU(N_c)$ algebra

In QCD calculations χ_{loops} keeps the colour number N_c unassigned by default, but with

$N_c := 3;$

the number is fixed to its standard model value. The $SU(N_c)$ algebra needs as ingredients

- ▷ the identity matrix of the $SU(N_c)$ algebra $\text{delta3}(\text{ta1}, \text{ta2})$ which should not be mixed with Kronecker $\text{delta8}(\text{ta1}, \text{ta2})$ which contracts the Gell-Mann matrices with the labels ta1 and ta2 . Of course $\text{delta3}(\text{ta1}, \text{ta2})$ and $\text{delta8}(\text{ta1}, \text{ta2})$ are both diagonal with entries 1 in the diagonal. This means that

$$\sum_{\text{ta1}} \text{delta3}(\text{ta1}, \text{ta1}) = N_c = 3; \quad \sum_{\text{ta1}} \text{delta8}(\text{ta1}, \text{ta1}) = N_c^2 - 1 = 8.$$

- ▷ the Gell-Mann matrices $Ts(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta3})$ themselves, where $\mathbf{ta1}$ – which is the number of the matrix – can take values from 1 to $N_c^2 - 1$. $\mathbf{ta2}$ and $\mathbf{ta3}$ are the indices of a particular Gell-Mann matrix and therefore have values from 1 to N_c . The $Ts(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta3})$ are normalized by the following trace condition:

$$\sum_{\mathbf{ta3}, \mathbf{ta4}} Ts(\mathbf{ta1}, \mathbf{ta3}, \mathbf{ta4}) Ts(\mathbf{ta2}, \mathbf{ta4}, \mathbf{ta3}) = 2 \delta_{\mathbf{ta1}, \mathbf{ta2}}.$$

- ▷ the usual structure functions $fs(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta3})$ and $ds(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta3})$ where all three indices vary from 1 to $N_c^2 - 1$. They are defined by the Lie algebra relation

$$\begin{aligned} & \sum_{\mathbf{ta5}} Ts(\mathbf{ta1}, \mathbf{ta3}, \mathbf{ta5}) Ts(\mathbf{ta2}, \mathbf{ta5}, \mathbf{ta4}) \\ &= \frac{2}{N_c} \delta_{\mathbf{ta1}, \mathbf{ta2}} \delta_{\mathbf{ta3}, \mathbf{ta4}} \\ &+ \sum_{\mathbf{ta5}} ds(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta5}) Ts(\mathbf{ta5}, \mathbf{ta3}, \mathbf{ta4}) \\ &+ i \sum_{\mathbf{ta5}} fs(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta5}) Ts(\mathbf{ta5}, \mathbf{ta3}, \mathbf{ta4}), \end{aligned}$$

where the $fs(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta5})$ are completely antisymmetric and the $ds(\mathbf{ta1}, \mathbf{ta2}, \mathbf{ta5})$ are completely symmetric.

4.2.10 Output

The output of the diagrams is decomposed in one or several form factors $C1, C2, \dots$ to reflect the Dirac γ or Lorentz structure of the result. Therefore a list of form factors is returned. The last entry in this list is the defining equation for the form factors. The result is presented in the *Maple text window* of the *main window* and has the following structure:

$$G1 := \underbrace{[C1 = \dots, \dots, Cn = \dots]}_{\text{the form factors } C_i} \underbrace{[C1 \ q1(\mathbf{nu1}) \ q2(\mathbf{nu2}) + \dots + Cn \ G(\mathbf{nu1}, \mathbf{nu2}) \dots]}_{\text{defining equation for form factors}}$$

Let us consider for instance the self-energy of a vector boson. $\chi loops$ finds as Lorentz structure $C1 \ G(\mathbf{nu1}, \mathbf{nu2}) + C2 \ q1(\mathbf{nu1}) \ q1(\mathbf{nu2})$ and the output roughly looks like

$$[C1 = term1, C2 = term2, C1 \ G(\mathbf{nu1}, \mathbf{nu2}) + C2 \ q1(\mathbf{nu1}) \ q1(\mathbf{nu2})],$$

where *term1* and *term2* denote the form factors. In the case of a fermionic self-energy the result carries no Lorentz index. Instead, it is decomposed with respect to $\&*(1, ONE)$, $\&*(1, Dg5)$, $\&*(1, Dg0)$ and $\&*(1, Dg5, Dg0)$ and in the general case the result is of the form

$$\begin{aligned} & [C1 = term1, C2 = term2, C3 = term3, C4 = term4, \\ & C1 \ (1 \ \&* \ ONE) + C2 \ (1 \ \&* \ Dg5) + C3 \ (1 \ \&* \ Dg0) + C4 \ \&*(1, Dg5, Dg0)]. \end{aligned}$$

Here all γ -matrices are contracted. In vertex functions with a fermion line and a vector boson there is also a $Dg(\mathbf{nu1})$ appearing. In appendix A several examples are given in more detail. In the case of a scalar self-energy there appears only one form factor and the result reads

$$[C1 = term1, C1].$$

The form factors can be written in several modes of evaluation which correspond to the different buttons of the *diagram windows*:

- ▷ With `Evaluate` or if no qualifier is added to the `EvalGraph` procedures the output – for simplicity – is returned in terms of unevaluated `Oneloop` and `Twoloop` functions which correspond directly to the `OneLoop` and `TwoLoop` functions explained in sect. 4.3 and 4.4.
- ▷ To get complete answers, `Eval. Full` or in the case of `EvalGraph1` and `EvalGraph2` the qualifier `full` forces `xloops` to evaluate directly the `Oneloop` and `Twoloop` integrals. To be precise, you have to type

`EvalGraphm(n,⟨list⟩,full);`

where m and n are numbers. Now each form factor $C1, \dots$ is a Laurent expansion in terms of the ultraviolet regulator $\varepsilon = (4 - D)/2$, where the significant coefficients of this expansion – $\mathcal{O}(\varepsilon^{-1})$, $\mathcal{O}(\varepsilon^0)$ in the one-loop case, $\mathcal{O}(\varepsilon^{-2})$, $\mathcal{O}(\varepsilon^{-1})$, $\mathcal{O}(\varepsilon^0)$ in the two-loop case – are denoted in form of a list. The bosonic self-energy we introduced before now has the structure

$$\begin{aligned} [C1 &= [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], \\ C2 &= [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], C1 \text{ G}(\text{nu1}, \text{nu2}) + C2 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2})] \end{aligned}$$

for one-loop contributions and

$$\begin{aligned} [C1 &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], \\ C2 &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], C1 \text{ G}(\text{nu1}, \text{nu2}) + C2 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2})] \end{aligned}$$

for two-loop diagrams. $\varepsilon^{-2}\text{-term}$ and $\varepsilon^{-1}\text{-term}$ are meant to represent the divergent part (the coefficients of $\frac{1}{\varepsilon^2}$ and $\frac{1}{\varepsilon}$) whereas $\varepsilon^0\text{-term}$ is describing the finite part of the corresponding form factor. For those two-loop topologies where no analytic result is known, the finite part contributes two entries to the output list. The first of them is a list itself which denotes an integral representation, the second contains the part which is analytically calculable:

$$\begin{aligned} [C1 &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \text{numeric}, \varepsilon^0\text{-term}], \\ C2 &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \text{numeric}, \varepsilon^0\text{-term}], \\ C1 \text{ G}(\text{nu1}, \text{nu2}) &+ C2 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2})]. \end{aligned}$$

A more detailed description of the integral representation – which was called here *numeric* – is given in sect. 4.4.3.

- ▷ The integral representation is evaluated directly with the help of `VEGAS` if `Eval. Numeric` is used or if the qualifier `full` replaced by two lists which contain the input information for `VEGAS`:

`EvalGraphm(n,⟨list⟩, [m1, m2], [n1, n2]);`

Within an ordinary `Maple` session one has in addition to assign the variable `NumPath` as described in sect. 4.6. The variables m_1, m_2, n_1, n_2 represent the grids where the integrand is evaluated: first m_1 iterations with m_2 points – `itmx` = m_1 and `ncall` = m_2 are passed to `VEGAS` – and then n_1 iterations with n_2 points – this corresponds to `itmx` = n_1 and `ncall` = n_2 . In the `Xwindow` interface these values can be changed with the entry `Numeric` of the `Options` menu (cf. sect. 4.6). Real and imaginary part are integrated one after the other.

The output has then the following structure:

$$\begin{aligned} \text{C1} &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, [\text{factor}, [\text{result}, \text{error}], \varepsilon^0\text{-term}], \\ \text{C2} &= [\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, [\text{factor}, [\text{result}, \text{error}], \varepsilon^0\text{-term}], \\ \text{C1} &\text{ G}(\text{nu1}, \text{nu2}) + \text{C2} \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2}) \end{aligned}$$

where *factor* denotes an analytically evaluated pre-factor of the integrand. The result of the integral itself is called *result* here, *error* describes the uncertainty of the numerical integration which is returned by VEGAS. To be specific: the entire $\mathcal{O}(\varepsilon^0)$ contribution is obtained by

$$\text{factor} \times \text{result} + \varepsilon^0\text{-term},$$

the complete uncertainty is

$$\text{factor} \times \text{error},$$

where the uncertainty of $\varepsilon^0\text{-term}$ is neglected.

If not all parameters of the integrand carry numerical values the numerical integration cannot be performed. Therefore the same output as for the qualifier **full** is returned.

- ▷ With Eval. More or in the case of **EvalGraph1**, with the qualifier **more** instead of **full**, *xloops* evaluates even the $\mathcal{O}(\varepsilon)$ of one-loop integrals. This becomes relevant if the one-loop integral is part of a two-loop calculation, because then it may be multiplied with a divergent one-loop *Z*-factor. This changes the output of a bosonic self-energy:

$$\begin{aligned} \text{C1} &= [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}], \\ \text{C2} &= [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}], \text{C1} \text{ G}(\text{nu1}, \text{nu2}) + \text{C2} \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2}). \end{aligned}$$

As far as the masses and momenta which enter the **EvalGraph** functions are symbols the output is given algebraically, whereas if they are all assigned with numbers the result will be numerical.

Generally, in the numerical case, the program sets the value of the imaginary part of the propagators, five digits higher than the numerical accuracy of the whole calculation, for example to 10^{-15} if one calculates with 20 digits. When reading the program **Maple** sets the number of digits to 20 – except when the user specified a higher accuracy before, for instance:

```
Digits:=40;
```

In the algebraic case just **rho** is returned. The output is facilitated by the usage of several abbreviations (4.23, 4.24, 4.25, 4.26) for certain one-loop contributions which are introduced in detail in the context of the **OneLoop** procedure in sect. 4.3.3. The abbreviations are substituted if the **evalRex** command is used (cf. sect. 4.3.3).

4.2.11 Special relations

If external momenta are zero or parallel, *xloops* omits those Lorentz vectors which are no longer independent and therefore redundant. The number of form factors – and the dimension of the parallel space – may decrease. If this is the case the form factors will no

longer be expressed in terms of proper `OneloopnPt` and `TwoloopnPtm` functions, but with the help of its variants `Oneloopk_nPt` and `Twoloopk_nPt` which are reduced in dimension of parallel space. The `Oneloopk_nPt` functions correspond to the `OneLoopk_nPt` functions from sect. 4.3.

If for instance in the case of the two-point function the external momentum `q1` shall vanish, one has to make the following assignment before starting the calculation:

```
q10:=0;
```

Now the bosonic self-energy reduces to

$$[C1 = term1, C1 \ G(nu1, nu2)]$$

which means that one form factor vanished. The only remaining form factor is expressed by a `Oneloop1_2Pt` function – this is a two-point function with a parallel space of dimension zero. The notation “1_2Pt” reflects the fact that this function carries properties of the two-point function as well as of the one-point function.

If in the case of a three-point function both external momenta `q1` and `q2` have a common rest frame one has to make the assignment

```
q21:=0;
```

Now the momentum `q2` will disappear from the equation which defines the form factors since it is no longer independent of `q1` (“zero recoil limit”). In addition the proper `Oneloop3Pt` will switch to `Oneloop2_3Pt` functions – a mixing of two- and three-point functions.

It is important here to make the assignment first and then to evaluate the diagram, because otherwise number and shape of form factors may be wrong. Moreover, if special relations exist which fix the variables of the `EvalGraph` functions or connect them with each other – like for instance the on-shell condition which connects masses and momenta – it is important first to declare these relations and then evaluate the functions.

Otherwise, if the functions are evaluated first analytically and then numbers or relations between variables are substituted in the result, `Maple` has to do more work than necessary. Moreover, it might happen in some special cases that an error occurs – something like “division by 0”. Usually this sort of divergence is artificial and not an error `xloops` is responsible for – at the moment of calculation the parameters which cause the error message were general analytical expressions. The problem can be overcome in either expanding in the critical parameters before the insertion of values, or – and this is recommended here – in calling the diagram window or the `EvalGraph` routines with the final values for the arguments from the very beginning, because the program was taught to detect a lot of this critical points and to avoid such artificial infinities in the result.

4.2.12 Fast evaluation

If the entry `Oneloop Library` of the `Options` menu is selected or – within an ordinary `Maple` session – the variable `LibPath` is assigned with some path, the procedures assume that a library of `OneLoop` functions is stored in the assigned directory – as described in sect. 4.5. The necessary integrals are then read from this directory – which of course is much faster (see sect. B.3). Otherwise, if `LibPath` is not assigned, the procedures are forced to recalculate the necessary `OneLoop` functions at any occurrence.

4.3 The OneLoop procedures

4.3.1 Input

There exist nine basic functions for the calculation of one-loop integrals. The first three functions

- ▷ OneLoop1Pt(p, m, t)
- ▷ OneLoop2Pt($p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2$)
- ▷ OneLoop3Pt($p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3$)

correspond to the notation in parallel and orthogonal space variables. The next three functions

- ▷ OneLoop1_2Pt(p, m_1, m_2, t_1, t_2)
- ▷ OneLoop1_3Pt($p, m_1, m_2, m_3, t_1, t_2, t_3$)
- ▷ OneLoop2_3Pt($p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3, t_1, t_2, t_3$)

are used in the case of reduced parallel space. All abovementioned functions require the tensor degree, the external momenta $\mathbf{q}_n$ and the masses m_n as input. The powers t_n of the propagator terms in the denominator are optional. The remaining three functions


- ▷ OneLoopTens1Pt(i, m, t)
- ▷ OneLoopTens2Pt($i, \mathbf{q}_1^2, m_1, m_2, t_1, t_2$)
- ▷ OneLoopTens3Pt($i, \mathbf{q}_1^2, \mathbf{q}_2^2, (\mathbf{q}_2 - \mathbf{q}_1)^2, m_1, m_2, m_3, t_1, t_2, t_3$)

require the squared external momenta as input variables and return the complete rank- i tensor. The powers t_n of the propagator terms in the denominator again are optional.

4.3.2 Notation

In detail the basic functions directly correspond to the following integrals:

- ▷ One-point function:

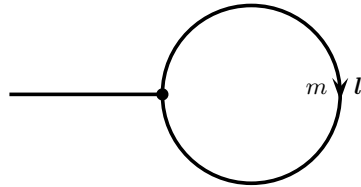


$$\text{OneLoop1Pt}(p, m, t) = A^{(p)(t)}(m) = \int d^D l \frac{(l^2)^{\frac{p}{2}}}{[l^2 - m^2 + i0]^t} \quad (4.5)$$

$$\text{OneLoop1Pt}(p, m) = \text{OneLoop1Pt}(p, m, 1) \quad (4.6)$$

$$\text{OneLoopTens1Pt}(i, m, t) = A_{\mu_1 \dots \mu_i}^{(t)}(m) = \int d^D l \frac{l_{\mu_1} \dots l_{\mu_i}}{[l^2 - m^2 + i0]^t} \quad (4.7)$$

$$\text{OneLoopTens1Pt}(i, m) = \text{OneLoopTens1Pt}(i, m, 1). \quad (4.8)$$

▷ Two-point function:

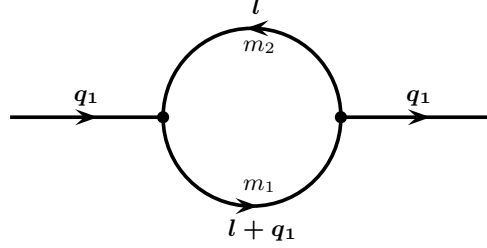

$$\begin{aligned} \text{OneLoop2Pt}(p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2) &= B^{(p_0 p_\perp)(t_1 t_2)}(q_{10}, m_1, m_2) \\ &= \int d^D l \frac{(l_0)^{p_0} (l_\perp)^{p_\perp}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \end{aligned} \quad (4.9)$$

$$\text{OneLoop2Pt}(p_0, p_\perp, q_{10}, m_1, m_2) = \text{OneLoop2Pt}(p_0, p_\perp, q_{10}, m_1, m_2, 1, 1) \quad (4.10)$$

$$\begin{aligned} \text{OneLoop1_2Pt}(p, m_1, m_2, t_1, t_2) \\ &= \int d^D l \frac{(l^2)^{\frac{p}{2}}}{[l^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \end{aligned} \quad (4.11)$$

$$\text{OneLoop1_2Pt}(p, m_1, m_2) = \text{OneLoop1_2Pt}(p, m_1, m_2, 1, 1) \quad (4.12)$$


$$\begin{aligned} \text{OneLoopTens2Pt}(i, \mathbf{q}_1^2, m_1, m_2, t_1, t_2) &= B_{\mu_1 \dots \mu_i}^{(t_1, t_2)}(\mathbf{q}_1^2, m_1, m_2) \\ &= \int d^D l \frac{l_{\mu_1} \dots l_{\mu_i}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \end{aligned} \quad (4.13)$$

$$\text{OneLoopTens2Pt}(i, \mathbf{q}_1^2, m_1, m_2) = \text{OneLoopTens2Pt}(i, \mathbf{q}_1^2, m_1, m_2, 1, 1). \quad (4.14)$$

Abbreviations:

$$q_{10} = \sqrt{\mathbf{q}_1^2}; \quad l_0 = \frac{l \cdot \mathbf{q}_1}{\sqrt{\mathbf{q}_1^2}}; \quad l_\perp = \sqrt{l_0^2 - l^2}. \quad (4.15)$$

▷ Three-point function:

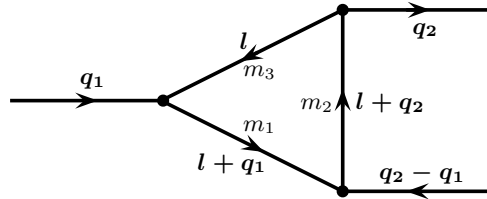

$$\begin{aligned} \text{OneLoop3Pt}(p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3) \\ &= C^{(p_0 p_1 p_\perp)(t_1, t_2, t_3)}(q_{10}, q_{20}, q_{21}, m_1, m_2, m_3) \\ &= \int d^D l \frac{(l_0)^{p_0} (l_1)^{p_1} (l_\perp)^{p_\perp}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [(l + \mathbf{q}_2)^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}} \end{aligned} \quad (4.16)$$

$$\begin{aligned}
& \text{OneLoop3Pt}(p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3) \\
&= \text{OneLoop3Pt}(p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3, 1, 1, 1)
\end{aligned} \tag{4.17}$$

$$\begin{aligned}
& \text{OneLoop2_3Pt}(p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3, t_1, t_2, t_3) \\
&= \int d^D l \frac{(l_0)^{p_0} (l_\perp)^{p_\perp}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [(l + \mathbf{q}_2)^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}} \\
& \text{OneLoop2_3Pt}(p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3) \\
&= \text{OneLoop2_3Pt}(p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3, 1, 1, 1)
\end{aligned} \tag{4.18}$$

$$\begin{aligned}
& \text{OneLoop1_3Pt}(p, m_1, m_2, m_3, t_1, t_2, t_3) \\
&= \int d^D l \frac{(l^2)^{\frac{p}{2}}}{[l^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}} \\
& \text{OneLoop1_3Pt}(p, m_1, m_2, m_3) = \text{OneLoop1_3Pt}(p, m_1, m_2, m_3, 1, 1, 1)
\end{aligned} \tag{4.19}$$

$$\begin{aligned}
& \text{OneLoopTens3Pt}(i, \mathbf{q}_1^2, \mathbf{q}_2^2, (\mathbf{q}_2 - \mathbf{q}_1)^2, m_1, m_2, m_3, t_1, t_2, t_3) \\
&= C_{\mu_1 \dots \mu_i}^{(t_1, t_2, t_3)}(\mathbf{q}_1^2, \mathbf{q}_2^2, (\mathbf{q}_2 - \mathbf{q}_1)^2, m_1, m_2, m_3) \\
&= \int d^D l \frac{l_{\mu_1} \dots l_{\mu_i}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [(l + \mathbf{q}_2)^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}}
\end{aligned} \tag{4.20}$$

$$\begin{aligned}
& \text{OneLoopTens3Pt}(i, \mathbf{q}_1^2, \mathbf{q}_2^2, (\mathbf{q}_2 - \mathbf{q}_1)^2, m_1, m_2, m_3) \\
&= \text{OneLoopTens3Pt}(i, \mathbf{q}_1^2, \mathbf{q}_2^2, (\mathbf{q}_2 - \mathbf{q}_1)^2, m_1, m_2, m_3, 1, 1, 1).
\end{aligned} \tag{4.21}$$

Abbreviations – using the auxiliary property (4.2):

$$\begin{aligned}
q_{10} &= \sqrt{\mathbf{q}_1^2}; & q_{20} &= \frac{\mathbf{q}_1 \cdot \mathbf{q}_2}{\sqrt{\mathbf{q}_1^2}}; & q_{21} &= \sqrt{\frac{(\mathbf{q}_1 \cdot \mathbf{q}_2)^2}{\mathbf{q}_1^2} - \mathbf{q}_2^2}; \\
l_0 &= \frac{l \cdot \mathbf{q}_1}{\sqrt{\mathbf{q}_1^2}}; & l_1 &= -\frac{l \cdot \hat{\mathbf{q}}_2}{\sqrt{-\hat{\mathbf{q}}_2^2}}; & l_\perp &= \sqrt{l_0^2 - l_1^2 - l^2}.
\end{aligned} \tag{4.22}$$

Our notation for the `OneLoop $n$ Pt` functions distinguishes between parallel and orthogonal space which is reflected by the definitions of (4.15) and (4.22) for the momentum components. Please keep in mind the fact that in our notation the indices $p_0, p_1, \dots$ represent the powers of the different components of the loop momentum $\mathbf{l}$ which should not be mixed with Lorentz indices $\mu_1, \mu_2, \dots$ of the corresponding tensor `OneLoopTens $n$ Pt`.

If the powers t_n of the propagator terms in the denominator are omitted like in (4.6, 4.8, 4.10, 4.14, 4.17, 4.21) the program assumes the value 1 for each t_n .

4.3.3 Output of `OneLoop $n$ Pt`

The results of the `OneLoop $n$ Pt` functions are Laurent expansions in terms of the ultraviolet regulator ε . Therefore the output of the `OneLoop $n$ Pt` procedures consists of a list where

the significant coefficients – $\mathcal{O}(\varepsilon^{-1})$, $\mathcal{O}(\varepsilon^0)$ – of this expansion are denoted. In two-loop calculations the term of $\mathcal{O}(\varepsilon^1)$ of the one-loop functions is also of interest. For that purpose this coefficient is also calculated if the qualifier **more** is used in the function call:

Eingabe	Ausgabe
OneLoop1Pt (p, m, t)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop1Pt (p, m, t, more)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$
OneLoop1_2Pt (p, m_1, m_2, t_1, t_2)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop1_2Pt ($p, m_1, m_2, t_1, t_2, \text{more}$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$
OneLoop2Pt ($p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop2Pt ($p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2, \text{more}$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$
OneLoop1_3Pt ($p, m_1, m_2, m_3, t_1, t_2, t_3$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop1_3Pt ($p, m_1, m_2, m_3, t_1, t_2, t_3, \text{more}$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$
OneLoop2_3Pt ($p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3, t_1, t_2, t_3$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop2_3Pt ($p_0, p_\perp, q_{10}, q_{20}, m_1, m_2, m_3, t_1, t_2, t_3, \text{more}$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$
OneLoop3Pt ($p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
OneLoop3Pt ($p_0, p_1, p_\perp, q_{10}, q_{20}, q_{21},$ $m_1, m_2, m_3, t_1, t_2, t_3, \text{more}$)	$[\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}]$

In the output $\varepsilon^{-1}\text{-term}$ is meant to represent the divergent part (the coefficient of $\frac{1}{\varepsilon}$) whereas $\varepsilon^0\text{-term}$ is describing the finite part and $\varepsilon^1\text{-term}$ the $\mathcal{O}(\varepsilon)$ contribution.

As long as the arguments of the **OneLoop** functions are symbols the output is given algebraically, whereas of course numbers inserted for the arguments imply a numerical result. Like in the case of the **EvalGraph** routines, in numerical evaluations the program sets the value of ϱ , the imaginary part of the propagators, five digits higher than the numerical accuracy of the whole calculation, for example to 10^{-15} if one calculates with 20 digits. In the algebraic case just **rho** is returned. To get a compact result also in algebraic calculations, the output is written by using several abbreviations:

$$\text{R2ex1}(x, y) = \sqrt{1 - \frac{x}{y}} \left[\ln \left(1 - \sqrt{1 - \frac{x}{y}} \right) - \ln \left(1 + \sqrt{1 - \frac{x}{y}} \right) + i\pi \right] \quad (4.23)$$

$$\begin{aligned} & -\ln(-x) - i\pi \\ \text{R2ex2}(x, y) = & \left(1 + \sqrt{1 - \frac{x}{y}} \right) \text{Li}_2 \left(1 - \frac{1 - \sqrt{1 - \frac{x}{y}}}{1 + \sqrt{1 - \frac{x}{y}}} \right) \\ & + \left(1 + \sqrt{1 - \frac{x}{y}} \right) \left[\ln \left(1 - \sqrt{1 - \frac{x}{y}} \right) \right]^2 \\ & + \left(1 - \sqrt{1 - \frac{x}{y}} \right) \text{Li}_2 \left(1 - \frac{1 + \sqrt{1 - \frac{x}{y}}}{1 - \sqrt{1 - \frac{x}{y}}} \right) \\ & + \left(1 - \sqrt{1 - \frac{x}{y}} \right) \left[\ln \left(1 + \sqrt{1 - \frac{x}{y}} \right) \right]^2 \\ & + \frac{1}{2} (\ln y)^2 + 2 (\ln x)^2 - 2 \ln x \ln y \end{aligned} \quad (4.24)$$

$$\begin{aligned}
& + (\ln y - 2 \ln x) \left[\left(1 + \sqrt{1 - \frac{x}{y}} \right) \ln \left(1 - \sqrt{1 - \frac{x}{y}} \right) \right. \\
& + \left. \left(1 - \sqrt{1 - \frac{x}{y}} \right) \ln \left(1 + \sqrt{1 - \frac{x}{y}} \right) \right] \\
& - i\pi \frac{\sqrt{x-y}}{\sqrt{-y}} [2 \ln 2 + \ln(x-y)] \\
\mathbf{R3ex2}(x, y, z) &= 2 \ln \left(1 - \frac{x}{z} \right) \eta(x, z) + 2 \ln \left(1 - \frac{y}{z} \right) \eta(y, z) \\
& + 2 \operatorname{Li}_2 \left(1 - \frac{x}{z} \right) + 2 \operatorname{Li}_2 \left(1 - \frac{y}{z} \right) + 2 (\ln z)^2
\end{aligned} \tag{4.25}$$

$$\begin{aligned}
\mathbf{R3ex3}(x, y, z) &= 4 \operatorname{S}_{12} \left(1 - \frac{x}{z} \right) - 4 \operatorname{Li}_3 \left(1 - \frac{x}{z} \right) + 4 \operatorname{S}_{12} \left(1 - \frac{y}{z} \right) - 4 \operatorname{Li}_3 \left(1 - \frac{y}{z} \right) \\
& - 4 \eta \left(x, \frac{1}{z} \right) \left\{ \operatorname{Li}_2 \left(\frac{x}{z} \right) + \ln \left(1 - \frac{x}{z} \right) \ln \left(-\frac{x}{z} \right) + \frac{1}{2} \left[\ln \left(1 - \frac{x}{z} \right) \right]^2 \right\} \\
& - 4 \eta \left(y, \frac{1}{z} \right) \left\{ \operatorname{Li}_2 \left(\frac{y}{z} \right) + \ln \left(1 - \frac{y}{z} \right) \ln \left(-\frac{y}{z} \right) + \frac{1}{2} \left[\ln \left(1 - \frac{y}{z} \right) \right]^2 \right\} \\
& - 4 \ln z \left[\operatorname{Li}_2 \left(1 - \frac{x}{z} \right) + \operatorname{Li}_2 \left(1 - \frac{y}{z} \right) \right] \\
& - 4 \ln z \left[\eta \left(x, \frac{1}{z} \right) \ln \left(1 - \frac{x}{z} \right) + \eta \left(y, \frac{1}{z} \right) \ln \left(1 - \frac{y}{z} \right) \right] \\
& + 2 \operatorname{Li}_3 \left(\frac{z-y}{z-x} \right) - 2 \operatorname{Li}_3 \left(\frac{(z-y)x}{(z-x)y} \right) + 2 \operatorname{Li}_3 \left(\frac{x}{y} \right) \\
& + \left[\ln \left(\frac{z-y}{z-x} \right) \right]^2 \eta \left(\frac{y-x}{z}, \frac{z}{z-x} \right) + 2 \eta \left(y-x, \frac{1}{z} \right) \\
& \times \left\{ \frac{1}{2} \left[\ln \left(\frac{z-y}{z-x} \right) \right]^2 - \ln \left(-\frac{z-y}{z-x} \right) \eta \left(\frac{z-y}{z}, \frac{z}{z-x} \right) \right\} \\
& + 2 (\ln x - \ln y) \left[\operatorname{Li}_2 \left(\frac{(z-y)x}{(z-x)y} \right) - \operatorname{Li}_2 \left(\frac{x}{y} \right) \right] \\
& - \ln \left(1 - \frac{x}{z} \right) (\ln x - \ln y)^2 - 2 \zeta(3) - \frac{4}{3} (\ln z)^3 \\
& + 2 \left[\ln x - \ln y - \frac{1}{2} \ln \left(\frac{(z-y)x}{(z-x)y} \right) \right] \ln \left(\frac{(z-y)x}{(z-x)y} \right) \eta \left(\frac{y-x}{y}, \frac{z}{z-x} \right).
\end{aligned} \tag{4.26}$$

These functions are related to the corresponding $\mathcal{R}$ functions³ [18, 19]. They represent the coefficients of the Taylor expansion in ε making use of (cf. [20])

$$\begin{aligned}
\zeta(n) &= \sum_{k=1}^{\infty} \frac{1}{k^n} \\
\operatorname{Li}_2(z) &= - \int_0^z \frac{\ln(1-s)}{s} ds \\
\operatorname{Li}_3(z) &= \int_0^z \frac{\operatorname{Li}_2(s)}{s} ds
\end{aligned}$$

³The function $\mathbf{R3ex3}(x, y, z)$ assumes that x and y have an imaginary part of different sign which is always the case.

$$S_{12}(z) = \frac{1}{2} \int_0^z \frac{\ln^2(1-s)}{s} ds$$

$$\eta(a, b) = 2\pi i [\theta(-\text{Im } a)\theta(-\text{Im } b)\theta(\text{Im}(ab)) - \theta(\text{Im } a)\theta(\text{Im } b)\theta(-\text{Im}(ab))] .$$

The function

`evalRex( $\langle expression \rangle$ )`;

substitutes the `Rnexam` functions in $\langle expression \rangle$ by the corresponding Polylogarithms.

4.3.4 Output of `OneLoopTensnPt`

The functions `OneLoopTensnPt` return a full tensor as output.

The output format looks similar to that of the `EvalGraph` routines. The following types of arguments – here only demonstrated for the two-point case – are allowed for all `OneLoopTensnPt` functions:

▷ `OneLoopTens2Pt( $i$ )`:

The rank i tensor decomposition of the two-point function is given. The procedure returns a list consisting in the different coefficients, which are expressed in terms of the `OneLoopnPt` tensor integrals, and the defining equation for the coefficients, for instance in the case $i = 2$:

$$\left[C21 = -\frac{\text{OneLoop2Pt}(0, 2)}{3 - 2\varepsilon}, C20 = -\frac{\text{OneLoop2Pt}(0, 2)}{q^2(-3 + 2\varepsilon)} + \frac{\text{OneLoop2Pt}(2, 0)}{q^2}, C20 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2}) + C21 \text{ G}(\text{nu1}, \text{nu2}) \right] .$$

▷ `OneLoopTens2Pt( $i$ , full)`:

The function inserts the results of the `OneLoopnPt` tensor integrals explicitly. Here again the case $i = 2$:

$$\left[C21 = [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], C20 = [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}], C20 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2}) + C21 \text{ G}(\text{nu1}, \text{nu2}) \right] .$$

▷ `OneLoopTens2Pt( $i$ ,  $\mathbf{q_1^2}$ ,  $m_1$ ,  $m_2$ ,  $t_1$ ,  $t_2$ )`:

The function returns the same as `OneLoopTens2Pt( $i$ , full)`, but expressed in the user-defined terms for $\mathbf{q_1^2}$, m_1 and m_2 . Of course numerical values are also allowed. t_1 and t_2 are optional.

▷ `OneLoopTens2Pt( $i$ ,  $\mathbf{q_1^2}$ ,  $m_1$ ,  $m_2$ ,  $t_1$ ,  $t_2$ , more)`:

The function returns also the $\mathcal{O}(\varepsilon)$ contribution. Again, t_1 and t_2 are optional:

$$\left[C21 = [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}], C20 = [\varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}, \varepsilon^1\text{-term}], C20 \text{ q1}(\text{nu1}) \text{ q1}(\text{nu2}) + C21 \text{ G}(\text{nu1}, \text{nu2}) \right] .$$

The $C20$, $C21$, ... correspond to the coefficients of the Passarino-Veltman procedure.

4.3.5 Infrared divergences

The program is regulating the infrared divergence of the three-point function as well – which may occur for instance if the momenta are on-shell and one mass is set to 0. There is no distinction made between UV and IR divergences – that means that there is no infrared dimension parameter ε_{IR} . Both kinds of divergences are described by $\varepsilon = (4 - D)/2$.

4.3.6 Special relations

If special relations exist which fix the variables of the **OneLoop** functions or connect them with each other – like for instance the on-shell condition – it is important first to declare these relations and then to call the functions – as already stressed in the case of the **EvalGraph** routines.

If the functions are evaluated first analytically and then numbers or relations between variables are substituted in the result, it might happen in some special cases that an error occurs – something like “division by 0”. Usually this sort of divergences is artificial due to the way the analytical result was written before the insertion (cf. sect. 4.2.11).

4.4 The TwoLoop procedures

4.4.1 Input

Unlike for the one-loop functions on the two-loop level for each n -point case exist different types of integrals – which correspond to different topologies with the same number of external legs. To distinguish between the different n -point functions with the same n the **TwoLoop** procedures acquire an additional identification number:

- ▷ **TwoLoop2Pt1**($p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5$)
- ⋮
- ▷ **TwoLoop2Pt8**($p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, t_1, t_2$)
- ▷ **TwoLoopTens2Pt1**($i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5$)
- ⋮
- ▷ **TwoLoopTens2Pt8**($i_1, i_2, \mathbf{q}_1^2, m_1, m_2, t_1, t_2$).

Like in the one-loop case each function needs the tensor degree, the external momenta $\mathbf{q}_n$ and the masses m_n as input. The powers t_n are again optional.


The functions **TwoLoopTens n Pt m** require the squared external momenta as input variables and return the complete tensor, whereas the functions **OneLoop n Pt m** correspond to the notation in parallel and orthogonal space variables.

4.4.2 Notation

The functions correspond to the following integrals:

▷ Two-point functions:


Topology 1:

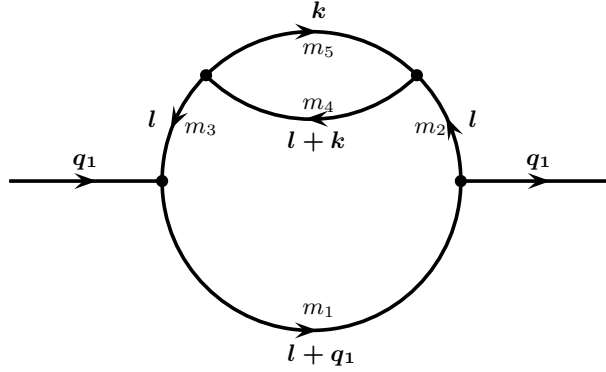

$$\begin{aligned} & \text{TwoLoop2Pt1}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5) \\ &= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}} \\ & \quad \times \frac{1}{[(l + k)^2 - m_4^2 + i\varrho]^{t_4} [k^2 - m_5^2 + i\varrho]^{t_5}} \end{aligned} \quad (4.27)$$

$$\begin{aligned} & \text{TwoLoopTens2Pt1}(i_1, i_2, q_1^2, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5) \\ &= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2} [l^2 - m_3^2 + i\varrho]^{t_3}} \\ & \quad \times \frac{1}{[(l + k)^2 - m_4^2 + i\varrho]^{t_4} [k^2 - m_5^2 + i\varrho]^{t_5}}. \end{aligned} \quad (4.28)$$

Topology 2:

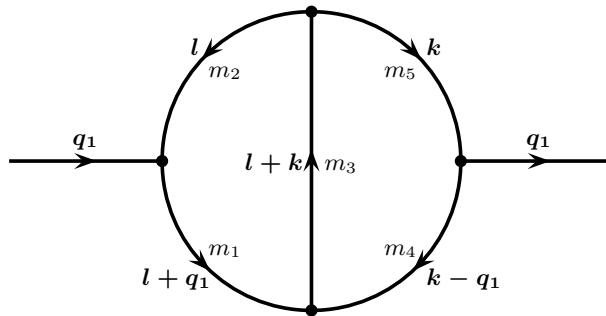


$$\begin{aligned} & \text{TwoLoop2Pt2}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5) \\ &= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2} [(l + k)^2 - m_3^2 + i\varrho]^{t_3}} \\ & \quad \times \frac{1}{[(k - q_1)^2 - m_4^2 + i\varrho]^{t_4} [k^2 - m_5^2 + i\varrho]^{t_5}} \end{aligned} \quad (4.29)$$

$$\text{TwoLoopTens2Pt2}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, m_4, m_5, t_1, t_2, t_3, t_4, t_5) \quad (4.30)$$

$$= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2} [(l + \mathbf{k})^2 - m_3^2 + i\varrho]^{t_3}} \\ \times \frac{1}{[(\mathbf{k} - \mathbf{q}_1)^2 - m_4^2 + i\varrho]^{t_4} [\mathbf{k}^2 - m_5^2 + i\varrho]^{t_5}} .$$

Topology 3:

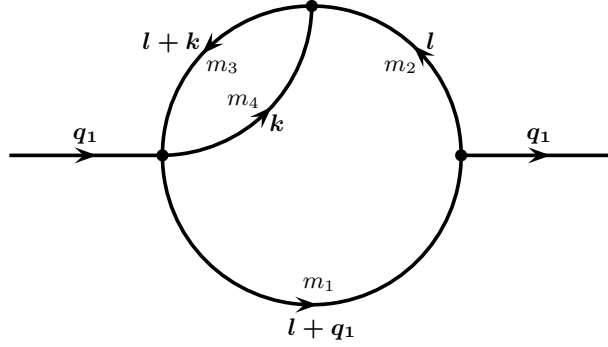


$$\text{TwoLoop2Pt3}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4)$$

$$= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \\ \times \frac{1}{[(l + \mathbf{k})^2 - m_3^2 + i\varrho]^{t_3} [\mathbf{k}^2 - m_4^2 + i\varrho]^{t_4}} \quad (4.31)$$

$$\text{TwoLoopTens2Pt3}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4)$$

$$= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \\ \times \frac{1}{[(l + \mathbf{k})^2 - m_3^2 + i\varrho]^{t_3} [\mathbf{k}^2 - m_4^2 + i\varrho]^{t_4}} . \quad (4.32)$$

Topology 4:

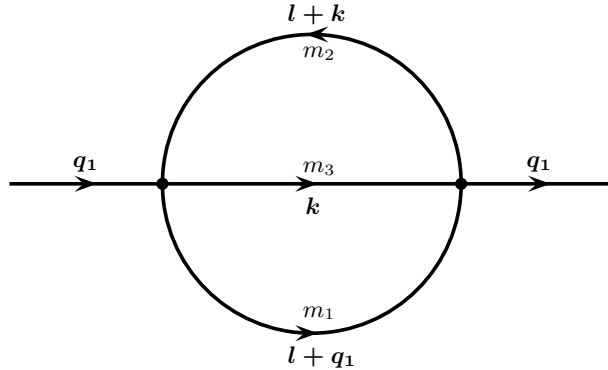


$$\text{TwoLoop2Pt4}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, t_1, t_2, t_3) \quad (4.33)$$

$$= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [(l + k)^2 - m_2^2 + i\varrho]^{t_2} [k^2 - m_3^2 + i\varrho]^{t_3}}$$

$$\text{TwoLoopTens2Pt4}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, t_1, t_2, t_3) \quad (4.34)$$

$$= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [(l + k)^2 - m_2^2 + i\varrho]^{t_2} [k^2 - m_3^2 + i\varrho]^{t_3}}.$$

Topology 5:

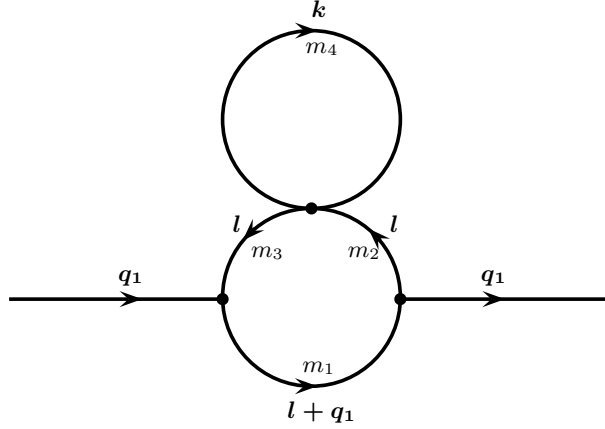

$$\text{TwoLoop2Pt5}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4)$$

$$= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \quad (4.35)$$


$$\times \frac{1}{[l^2 - m_3^2 + i\varrho]^{t_3} [k^2 - m_4^2 + i\varrho]^{t_4}}$$

$$\text{TwoLoopTens2Pt5}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4)$$

$$= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + q_1)^2 - m_1^2 + i\varrho]^{t_1} [l^2 - m_2^2 + i\varrho]^{t_2}} \quad (4.36)$$

$$\times \frac{1}{[l^2 - m_3^2 + i\varrho]^{t_3} [k^2 - m_4^2 + i\varrho]^{t_4}}.$$


Topology 6:

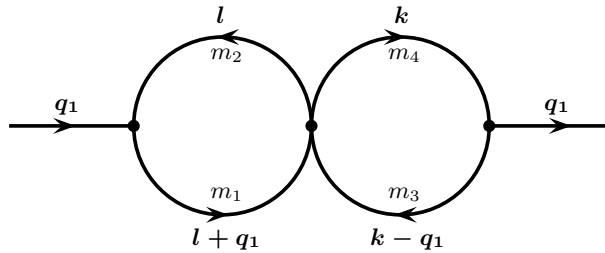

$$\begin{aligned}
& \text{TwoLoop2Pt6}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4) \\
&= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{l}^2 - m_2^2 + i\varrho]^{t_2}} \\
&\quad \times \frac{1}{[(\mathbf{k} - \mathbf{q}_1)^2 - m_3^2 + i\varrho]^{t_3} [\mathbf{k}^2 - m_4^2 + i\varrho]^{t_4}}
\end{aligned} \tag{4.37}$$

$$\begin{aligned}
& \text{TwoLoopTens2Pt6}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4) \\
&= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{l}^2 - m_2^2 + i\varrho]^{t_2}} \\
&\quad \times \frac{1}{[(\mathbf{k} - \mathbf{q}_1)^2 - m_3^2 + i\varrho]^{t_3} [\mathbf{k}^2 - m_4^2 + i\varrho]^{t_4}}.
\end{aligned} \tag{4.38}$$


Topology 7:

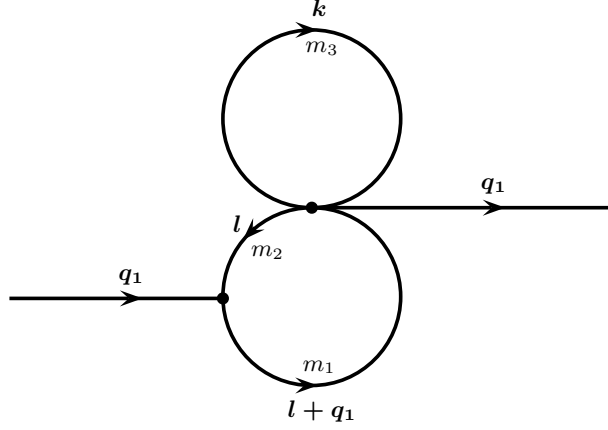

$$\begin{aligned}
& \text{TwoLoop2Pt7}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, t_1, t_2, t_3) \\
&= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{l}^2 - m_2^2 + i\varrho]^{t_2} [\mathbf{k}^2 - m_3^2 + i\varrho]^{t_3}}
\end{aligned} \tag{4.39}$$

$$\begin{aligned}
& \text{TwoLoopTens2Pt7}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, m_3, t_1, t_2, t_3) \\
&= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{l}^2 - m_2^2 + i\varrho]^{t_2} [\mathbf{k}^2 - m_3^2 + i\varrho]^{t_3}}.
\end{aligned} \tag{4.40}$$

Topology 8:

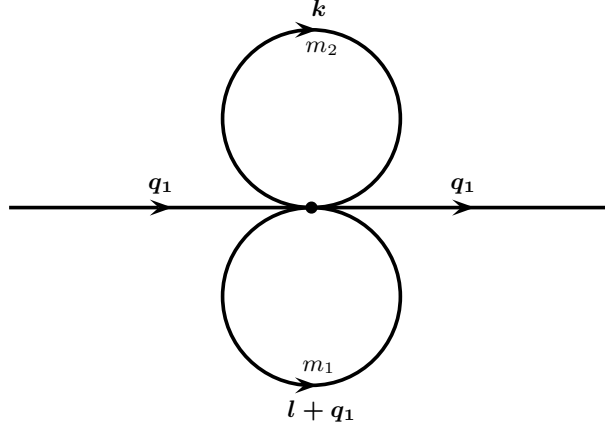

$$\text{TwoLoop2Pt8}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, t_1, t_2) \quad (4.41)$$

$$= \int d^D l \int d^D k \frac{(l_0)^{p_0} (l_\perp)^{p_\perp} (k_0)^{r_0} (k_\perp)^{r_\perp} (z)^s}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{k}^2 - m_2^2 + i\varrho]^{t_2}}$$

$$\text{TwoLoopTens2Pt8}(i_1, i_2, \mathbf{q}_1^2, m_1, m_2, t_1, t_2) \quad (4.42)$$

$$= \int d^D l \int d^D k \frac{l_{\mu_1} \cdots l_{\mu_{i_1}} k_{\nu_1} \cdots k_{\nu_{i_2}}}{[(l + \mathbf{q}_1)^2 - m_1^2 + i\varrho]^{t_1} [\mathbf{k}^2 - m_2^2 + i\varrho]^{t_2}}.$$

Like in the one-loop case for each function holds

$$\begin{aligned} & \text{TwoLoop2Pt}n(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k) \\ &= \text{TwoLoop2Pt}n(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k, 1, \dots, 1) \end{aligned} \quad (4.43)$$

$$\begin{aligned} & \text{TwoLoopTens2Pt}n(i_1, i_2, \mathbf{q}_1^2, m_1, \dots, m_k) \\ &= \text{TwoLoopTens2Pt}n(i_1, i_2, \mathbf{q}_1^2, m_1, \dots, m_k, 1, \dots, 1). \end{aligned} \quad (4.44)$$

This means that if the powers t_n of the propagator terms in the denominator are omitted the program assumes the value 1 for each t_n .

The abbreviations (4.15) we made in the one-loop case for parallel and orthogonal space notation are still valid.

There are several relations between different two-point functions. Some of them we would like to mention here:

$$\begin{aligned} & \text{TwoLoop2Pt1}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, m_5) \\ &= \frac{1}{m_3^2 - m_2^2} [\text{TwoLoop2Pt3}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_3, m_4, m_5) \\ & \quad - \text{TwoLoop2Pt3}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_4, m_5)] \end{aligned} \quad (4.45)$$

$$\begin{aligned} & \text{TwoLoop2Pt5}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4) \\ &= \frac{1}{m_3^2 - m_2^2} [\text{TwoLoop2Pt7}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_3, m_4) \\ & \quad - \text{TwoLoop2Pt7}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_4)] . \end{aligned} \quad (4.46)$$

Both relations are only valid for $m_2 \neq m_3$, otherwise one has

$$\begin{aligned} \text{TwoLoop2Pt1}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_2, m_4, m_5, t_1, t_2, t_3, t_4, t_5) \\ = \text{TwoLoop2Pt3}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_4, m_5, t_1, t_2 + t_3, t_4, t_5) \end{aligned} \quad (4.47)$$

$$\begin{aligned} \text{TwoLoop2Pt5}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_2, m_4, t_1, t_2, t_3, t_4) \\ = \text{TwoLoop2Pt7}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_4, t_1, t_2 + t_3, t_4). \end{aligned} \quad (4.48)$$

The two-point functions numbered with 1-4 are nonfactorizable whereas the functions 5-8 are products of one-loop integrals, for instance

$$\begin{aligned} \text{TwoLoop2Pt6}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, m_4, t_1, t_2, t_3, t_4) \\ = \begin{cases} \frac{(\frac{1}{2}, \frac{s}{2})}{(\frac{D-1}{2}, \frac{s}{2})} \text{OneLoop2Pt}(p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2) \\ \quad \times \text{OneLoop2Pt}(r_0, r_\perp, -q_{10}, m_3, m_4, t_3, t_4) & \text{if } s \text{ even} \\ 0 & \text{if } s \text{ odd} \end{cases} \end{aligned} \quad (4.49)$$

$$\begin{aligned} \text{TwoLoop2Pt7}(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, m_2, m_3, t_1, t_2, t_3) \\ = \begin{cases} \frac{(\frac{1}{2}, \frac{s}{2})}{(\frac{D-1}{2}, \frac{s}{2})} (-1)^{\frac{r_\perp}{2}} \frac{(D-1) \cdots (D-3+r_\perp)}{D \cdots (D-2+r_0+r_\perp)} \frac{r_0!}{(\frac{r_0}{2})! 2^{\frac{r_0}{2}}} \\ \quad \times \text{OneLoop2Pt}(p_0, p_\perp, q_{10}, m_1, m_2, t_1, t_2) \\ \quad \times \text{OneLoop1Pt}(r_0 + r_\perp, m_3, t_3) & \text{if } s, r_0, r_\perp \text{ even} \\ 0 & \text{else.} \end{cases} \end{aligned} \quad (4.50)$$

4.4.3 Output of TwoLoopnPtm

The output – like in the one-loop case – is a list which contains the relevant coefficients of the Laurent expansion in ε . Ultraviolet divergences at the two-loop level occur as terms of $\mathcal{O}(\varepsilon^{-2})$ and $\mathcal{O}(\varepsilon^{-1})$. Therefore the notation of the output starts with two divergent coefficients.

For the two-point functions 1-4 the finite part cannot be given completely analytically for all mass cases. Therefore these functions have two entries in the output list which describe the finite part. The first one is a list itself denoting an integral representation, the second one gives the analytically calculable terms.

The integral representation is evaluated directly with the help of VEGAS if two arguments are added. Both arguments must be lists which contain each two numbers. These numbers carry the input information for VEGAS. Within an ordinary Maple session one has in addition to assign the variable NumPath as described in sect. 4.6.

input	output
$\text{TwoLoop2Pt}m(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k, t_1, \dots, t_k)$	$[\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \text{numeric}, \varepsilon^0\text{-term}]$
$\text{TwoLoop2Pt}m(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k, t_1, \dots, t_k, [l_1, l_2], [n_1, n_2])$	$[\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, [\text{factor}, [\text{result}, \text{error}]], \varepsilon^0\text{-term}]$

numeric describes the integral representation. This list consists of the following entries

$$[factor, integrand, x=-infinity..infinity, y=-infinity..infinity]$$

where *integrand* is the integrand of the integral representation which has to be integrated over x and y in the interval $(-\infty, \infty)$. *factor* is an analytical factor which multiplies the integral representation.

The variables l_1, l_2, n_1, n_2 represent the grids where the integrand is evaluated: first l_1 iterations with l_2 points – `itmx` = l_1 and `ncall` = l_2 are passed to **VEGAS** – and then n_1 iterations with n_2 points – this corresponds to `itmx` = n_1 and `ncall` = n_2 . Real and imaginary part are integrated one after the other.

The other entries of the output list have the same behaviour as in the one-loop case: As long as the arguments of the **TwoLoop** functions are symbols the output is given algebraically, whereas numbers inserted for the arguments imply a numerical result. In the numerical case, the program sets the value of ϱ , the imaginary part of the propagators, five digits higher than the numerical accuracy of the whole calculation, for example to 10^{-15} if one calculates with 20 digits. In the algebraic case just “rho” is returned.

In the case where all internal particles are massless the result is of course known analytically. In this case *numeric* is just [0].

The two-point functions 5-8 are products of one-loop integrals and therefore evaluated completely analytically. The output list has no entry for numerical evaluation and looks simply like:

input	output
TwoLoop2Pt $m(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k, t_1, \dots, t_k)$	$[\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$
TwoLoop2Pt $m(p_0, p_\perp, r_0, r_\perp, s, q_{10}, m_1, \dots, m_k, t_1, \dots, t_k, [l_1, l_2], [n_1, n_2])$	$[\varepsilon^{-2}\text{-term}, \varepsilon^{-1}\text{-term}, \varepsilon^0\text{-term}]$

The optional input of two lists for the **VEGAS** input data doesn’t affect the output since no numerical integration is performed here. The $\mathcal{O}(\varepsilon^1)$ is not relevant in two-loop calculations. Therefore the qualifier **more** does not exist for two-loop functions.

The divergent part of two-loop integrals is closely related to one-loop integrals. Therefore the same abbreviations (4.23, 4.24) as for one-loop integrals are appearing. They are substituted if the `evalRex` command is used (cf. sect. 4.3.3).

4.4.4 Output of **TwoLoopTensnPtm**

The functions **TwoLoopTensnPtm** return a full tensor as output. The same types of arguments are allowed as for the corresponding **OneLoopTensnPt** functions described in sect. 4.3.4 – except the qualifier **more**.

4.5 The **OneLoopLib** procedures

For different calculations of the same **OneLoop** function it is of course rather inconvenient to start the whole program again. Therefore our package includes the functions

▷ **OneLoopLib2Pt**(i, j)

▷ **OneLoopLib3Pt**(i, j)

which generate a library of all `OneLoop2Pt` and `OneLoop3Pt` functions respectively up to the tensor rank i . All powers of the denominators from 1 to j are considered. The second parameter j is optional. If it is omitted the procedures assume the value 1 for j , so that no powers of denominators higher than one are calculated. These functions are then read by the proper procedures described before, so that they in any case speed up.

If you use the `OneLoopLib` functions within an ordinary `Maple` session and want to write this library in any other than the actual directory you have to assign the variable `LibPath`:

```
LibPath:=⟨path⟩;
```

Now the library will be written to $\langle path \rangle$. The procedures will only look for the library if the entry `OneLoop Library` of the `Options` menu is selected or if `LibPath` is assigned. If the procedures search for an integral which is not contained in the library it will be calculated and stored in the library on the fly. Each integral corresponds to one file. In appendix B.2 we list the convention for the file names.

4.6 Numerical integration with VEGAS

For numerical integration a parallelized implementation of the VEGAS algorithm for C++ invented by R. Kreckel is provided with $\chi loops$. To use the routines within an ordinary `Maple` session one has to declare the variable `NumPath`:

```
NumPath:=⟨path⟩;
```

$\langle path \rangle$ describes the directory where the integration routines are located. If $\chi loops$ is installed properly this is the subdirectory `cxx` of the $\chi loops$ directory.

The routines are customized for those `TwoLoop` procedures which cannot be calculated analytically. The most elegant way to perform those numerical integrations is described in sect. 4.2.10 and 4.4.3. In addition there is also the possibility to perform an integration separately. For that purpose there exists the command

```
NumIntC(⟨integrand⟩, [m1, m2], [n1, n2]);
```

$\langle integrand \rangle$ denotes the expression which has to be integrated numerically. $\chi loops$ expects the integration variables to be named `x` and `y` – as they are called by the `EvalGraph2` and `TwoLoop` procedures. The variables m_1, m_2, n_1, n_2 represent the grids where the integrand is evaluated: first m_1 iterations with m_2 points – `itmx` = m_1 and `ncall` = m_2 are passed to VEGAS – and then n_1 iterations with n_2 points – this corresponds to `itmx` = n_1 and `ncall` = n_2 . Real and imaginary part are integrated one after the other. If only the real part is of interest one has to specify

```
NumIntC(⟨integrand⟩, [m1, m2], [n1, n2], Re);
```

if only the imaginary part shall be evaluated one writes

```
NumIntC(⟨integrand⟩, [m1, m2], [n1, n2], Im);
```

If `NumIntC` is called only with the first argument $\chi loops$ takes the values $m_1 = 20$, $m_2 = 1000$, $n_1 = 5$ and $n_2 = 10000$.

The output has the following format:

$$[\langle result \rangle, \langle error \rangle].$$

$\langle result \rangle$ describes the – possibly complex – numerical result, $\langle error \rangle$ is the uncertainty (1σ) of the numerical integration which is returned by VEGAS.

NumIntC performs the necessary internal steps („compile, link“) and starts the C++ program as subprocess. Maple waits until the subprocess terminates and finally re-reads the result.

The numerical integration with VEGAS should be used only once by each user. Otherwise there will occur conflicts because several numerical integrations would use the same C++ files.

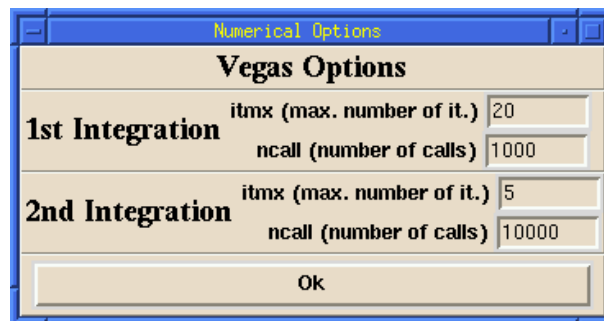


Figure 4.7: Options for VEGAS

The entry Numeric of the Options menu enables the user to change the parameters for VEGAS. These parameters are set in a window displayed in fig. 4.7.

5 *Conclusion and outlook*

Our aim was to introduce a program package that gives any computer user the possibility to calculate particle processes without much effort in manpower and hardware. At this stage of development the program is still understood to be under construction. In fact we are planning to incorporate several additional features:

- ▷ One-loop four-, five- and six-point functions.
- ▷ Two-loop three- and four-point functions.
- ▷ Calculation of complete processes, generation of all diagrams which contribute to a process in a given order.
- ▷ Incorporation of other models, for instance supersymmetric theories.
- ▷ An interface for adding other models.
- ▷ A plotting device for automatical plotting of results.
- ▷ Automatical renormalization, determination of Z factors and renormalized functions.

Acknowledgements

We would like to thank R. Stemler for his help in developing several procedures and A. Frink for his contribution and advice in developing the numerics and for valuable tests.

Appendix

A.1 Installation

```
bytes used=1001220, alloc=851812, time=0.03
bytes used=2011736, alloc=1310480, time=0.03
> LibPath := '../lib/' ;
                                LibPath := ../lib/
```

```
> EvalGraph1(3,[higgs,higgs,higgs,higgs,higgs,higgs],full);
bytes used=3011944, alloc=1834672, time=0.03
> quit;
bytes used=3662072, alloc=1834672, time=0.03
```

Did you see any result of the Maple command 'EvalGraph' used above [y/n] ? n

System configuration completed, doing now some checks !

This may take a while !

Creating the index file for tcl !

Now testing the Makefile for numerical integrations generated for your System !

```
rm -f main funct.o numint.o div0.o vegas.o gauss.o utils.o
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-
functions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-l
oops -ffast-math -c funct.cxx
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-
functions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-l
oops -ffast-math -c numint.cxx
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-
functions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-l
oops -ffast-math -c div0.cxx
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-fun
ctions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-loop
s -ffast-math -D_REENTRANT -DPVEGAS_POSIX -c vegas.c
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-
functions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-l
oops -ffast-math -c gauss.cxx
g++ -DGNU_COMPLEX -O3 -fomit-frame-pointer -finline-functions -m486 -malign-
functions=4 -malign-jumps=4 -malign-loops=4 -fexpensive-optimizations -funroll-l
oops -ffast-math -c utils.cxx
g++ -o main funct.o numint.o div0.o vegas.o gauss.o utils.o -lm -lpthread mai
n.cxx
```

Division by 0 Errors will be ignored

Test: 1/0

Initializing SR-sequences with seed 876920052

```
Input parameters for vegas: ndim= 2 ncall= 968 2 thread(s)
                           ittot= 1 itmx= 5 22^1 hypercubes
                           nprn= 0 ALPH= 1.50
                           mds= 1 nd= 200 npg=2
                           xl[ 1]= 0 xu[ 1]= 1
                           xl[ 2]= 0 xu[ 2]= 1
```

```
iteration no. 1 : integral = -1.077957e-06 +/- 9.2e-07
all iterations: integral = -1.077957e-06 +/- 9.2e-07 chi**2/IT n = 0
iteration no. 2 : integral = 1.703926e-07 +/- 7.1e-07
all iterations: integral = -2.975584e-07 +/- 5.6e-07 chi**2/IT n = 1.2
iteration no. 3 : integral = 1.407306e-09 +/- 4.3e-07
all iterations: integral = -1.079265e-07 +/- 3.4e-07 chi**2/IT n = 0.67
iteration no. 4 : integral = -6.310369e-08 +/- 4e-07
all iterations: integral = -8.938296e-08 +/- 2.6e-07 chi**2/IT n = 0.45
iteration no. 5 : integral = -2.702396e-07 +/- 3.2e-07
all iterations: integral = -1.618004e-07 +/- 2e-07 chi**2/IT n = 0.38
```

```
Input parameters for vegas: ndim= 2 ncall= 9800 2 thread(s)
                           ittot= 1 itmx= 3 70^1 hypercubes
                           nprn= 0 ALPH= 1.50
                           mds= 1 nd= 200 npg=2
```

```

                                xl[ 1]=          0 xu[ 1]=          1
                                xl[ 2]=          0 xu[ 2]=          1
iteration no.   1 : integral = -4.470697e-08 +/-    6.2e-08
all iterations: integral = -4.470697e-08 +/-    6.2e-08 chi**2/IT n =          0
iteration no.   2 : integral =  2.028027e-08 +/-    5.3e-08
all iterations: integral = -6.763662e-09 +/-    4e-08 chi**2/IT n =          0.63
iteration no.   3 : integral = -2.663549e-08 +/-    5.1e-08
all iterations: integral = -1.435286e-08 +/-    3.2e-08 chi**2/IT n =          0.36
Total Number of ignored Divisions by 0: 0
Input parameters for vegas: ndim=   2 ncall=   968      2 thread(s)
                           ittot=   1 itmx=    5      22^1 hypercubes
                           nprn=   0 ALPH= 1.50
                           mds=   1 nd= 200          npg=2
                                xl[ 1]=          0 xu[ 1]=          1
                                xl[ 2]=          0 xu[ 2]=          1
iteration no.   1 : integral =  7.704579e-06 +/-    1.3e-06
all iterations: integral =  7.704579e-06 +/-    1.3e-06 chi**2/IT n =          0
iteration no.   2 : integral =  8.286222e-06 +/-    6.8e-07
all iterations: integral =  8.160574e-06 +/-    6.1e-07 chi**2/IT n =          0.16
iteration no.   3 : integral =  9.681104e-06 +/-    6.2e-07
all iterations: integral =  8.902334e-06 +/-    4.3e-07 chi**2/IT n =          1.6
iteration no.   4 : integral =  8.987195e-06 +/-    5e-07
all iterations: integral =  8.938647e-06 +/-    3.3e-07 chi**2/IT n =          1.1
iteration no.   5 : integral =  8.732733e-06 +/-    3.7e-07
all iterations: integral =  8.84922e-06 +/-    2.5e-07 chi**2/IT n =          0.85
Input parameters for vegas: ndim=   2 ncall=  9800      2 thread(s)
                           ittot=   1 itmx=    3      70^1 hypercubes
                           nprn=   0 ALPH= 1.50
                           mds=   1 nd= 200          npg=2
                                xl[ 1]=          0 xu[ 1]=          1
                                xl[ 2]=          0 xu[ 2]=          1
iteration no.   1 : integral =  8.890832e-06 +/-    1e-07
all iterations: integral =  8.890832e-06 +/-    1e-07 chi**2/IT n =          0
iteration no.   2 : integral =  8.87138e-06 +/-    5.3e-08
all iterations: integral =  8.875575e-06 +/-    4.7e-08 chi**2/IT n =          0.029
iteration no.   3 : integral =  8.798005e-06 +/-    4.7e-08
all iterations: integral =  8.836898e-06 +/-    3.4e-08 chi**2/IT n =          0.68
Total Number of ignored Divisions by 0: 0

```

Make seems to work, so Makefile is correct !

If you had problems please edit the Makefile in the subdirectory ./cxx until it compiles correctly. Please report your system configuration and Makefile changes to xloops@thep.physik.uni-mainz.de !

Do you agree sending the XLOOPS team a mail [Y/n] ? Y

XLOOPS installed successfully, invoke with ./xloops !


A.2 Examples with the Xwindows frontend

To demonstrate the input and output of *χloops* some typical examples are given. The Feynman diagrams in this chapter are Postscript pictures produced with *χloops*.

A.2.1 Output of one-loop integrals

Analytic examples

At first we want to show the different ways of evaluating the diagrams. As an example we have chosen a simple self-energy diagram. The advantage of this diagram is the relatively short result. The diagram on the right shows the process, a nondiagonal Z self-energy with a W bubble.



With Evaluate the following result is obtained:

$$\begin{aligned}
 G1 := [& \\
 & C1 = \frac{1}{16} I e^2 \cos^2(\tau w) (1 + \text{eps} \text{Ln}(4 \text{Pi}^2 \text{MU})) + \frac{1}{2} \text{eps} \text{Ln}(4 \text{Pi}^2 \text{MU}) \\
 & \quad (6 I - 4 I \text{eps}) \text{Oneloop1Pt}(0, Mw) \Big/ (\sin^4(\tau w) \text{Pi}), \\
 & C1 G(\text{nu1}, \text{nu2})]
 \end{aligned}$$

As expected, the structure of form factors, indicated by the last element of the list above, is just proportional to $g^{\mu\nu}$. The pre-factor $C1$ is determined by an equation, which shows the corresponding `OneLoop` functions. In this example just `Oneloop1Pt(0, Mw)` appears. As pre-factor the coupling e , the Weinberg angle τw and the renormalization parameter MU occur.

With Eval. Full the `OneLoop` function can be evaluated further:

$$\begin{aligned}
 GF2 := [& \\
 & C1 = [- \frac{3}{8} \frac{I e^2 \cos^2(\tau w) Mw^2}{\sin^2(\tau w) \text{Pi}}, \\
 & \quad \frac{1}{16} I (-6 \text{Ln}(4 \text{Pi}^2 \text{MU}) \text{Pi}^2 Mw^2 + 4 \text{Pi}^2 Mw^2 \\
 & \quad - 6 (-\text{Ln}(Mw^2 - I \text{rho}) - \text{Ln}(\text{Pi}) - \text{gamma} + 1) \text{Pi}^2 Mw^2) e^2 \cos^2(\tau w) \\
 & \quad \Big/ (\sin^4(\tau w) \text{Pi})], \\
 & C1 G(\text{nu1}, \text{nu2})]
 \end{aligned}$$

Now the constant **C1** is evaluated to a list, which elements represent the coefficients of the Laurent series in the dimensional regulator $\varepsilon = (4 - D)/2$. The first element of the list shows the divergence of the integral, the second element the convergent part.

Additionally the next order in dimensional regularization can be evaluated. Clicking on **Eval. More** shows the result:

```
GM3 := [
  2      2      2      2      2      2      2      2      2      2
  I e cos(tw) Mw      I (- 6 Ln(4 Pi MU ) Pi Mw + 4 Pi Mw - 6 %1) e cos(tw)
C1 = [- 3/8 -----, 1/16 -----,
      2      4
      sin(tw) Pi      sin(tw) Pi

  2      2      2      2      2      2
  1/16 I e cos(tw) (- 3 Ln(4 Pi MU ) Pi Mw

  2      2      2      2      2      2
  + Ln(4 Pi MU ) (4 Pi Mw - 6 %1) - 6 (1/2 Ln(Mw - I rho)

  2      2
  - (- Ln(Pi) - gamma + 1) Ln(Mw - I rho) + 1/2 Ln(Pi)

  2      2      2      2
  - (- gamma + 1) Ln(Pi) + 1/12 Pi + 1/2 gamma - gamma + 1) Pi Mw + 4 %1

  /
  / (sin(tw) Pi )
  /

],


C1 G(nu1, nu2)]

%1 :=      2      2      2
      (- Ln(Mw - I rho) - Ln(Pi) - gamma + 1) Pi Mw
```

In the above result the list for **C1** was just enhanced by an additional element, the $\mathcal{O}(\varepsilon^1)$.

Numerical examples

In the following subsection we want to show some numerical examples, where different kinds of form factors occur. The values for couplings and particle masses were inserted with **Insert Particle Properties** from the **Options** menu. The momentum was set to $q_{10} := M_Z 0$; and the renormalization parameter was chosen to be $M_U := 1$. All results are given in natural units $\hbar = c = 1$ and the energy scale GeV.

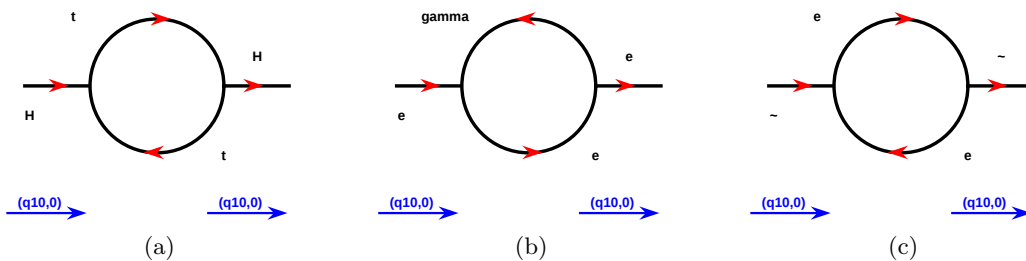

The results, when evaluated with `[Eval. Full]`, read:

(a)

```
GF4 := [
  C1 = [ - 2143.7993127296539430 I,
        - .33537943559210349312*10-15 + 16785.676157258815796 I], C1]
```

(b)

```
GF5 := [
  C1 = [ - .11869586429575443972*10-5 I,
        .37289405527131873878*10-5 + .66133100616139736842*10-5 I],
  C2 =
    [.052942866215076463492 I, - .16632491956127147989 - .32145019412334161258 I],
  C1 (1 &* ONE) + C2 (1 &* Dg0)]
```


(c)

```
GF6 := [
  C1 =
    [- 6.4357348171046949024 I, 20.218457221868161079 + 34.784995718164094540 I],
  C2 = [.00077427320705022066450 I,
        - .0024324510191403821401 - .0041849285213475828278 I],
  C1 G(nu1, nu2) + C2 q1(nu1) q1(nu2)]
```

Figure (a) shows a scalar self-energy. So the result just consists of the scalar constant $C1$. Like in the previous example $C1$ is expanded as a series in ε . Figure (b) shows a fermionic self-energy, which has Dirac structure. So the form factors are the unity matrix `ONE` and `Dg0`. The pre-factors $C1$ and $C2$ are again represented as lists of coefficients of the Laurent series in ε . Finally figure (c) shows a vector boson self-energy. The result is proportional to the metric tensor $G(\text{nu1}, \text{nu2})$ and to the product of the external momenta $q1(\text{nu1}) q1(\text{nu2})$. Again two constants, $C1$ and $C2$, are needed.

A.2.2 Two-loop diagrams

Now some two-loop diagrams shall be evaluated numerically. The values are chosen as in the previous section, if no comment is made. First we want to show some two-loop diagrams which factorize, starting with a photon self-energy:

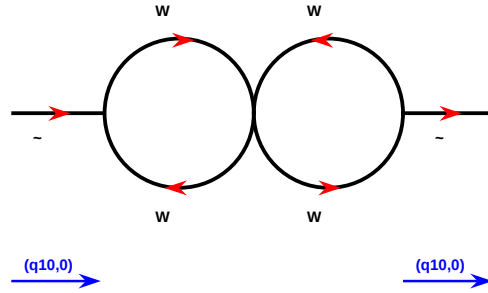

```

GF7 := [C1 = [ - .16744033026458920315 I,
               -19
               .70833637543010397531*10  + 2.1988161494279602884 I,
               -17
               - .42232923827218965144*10  - 14.715169445826507291 I],
        C2 = [.000020136974316008130172 I,
               -23
               - .85187071577025180931*10  - .00026443751189864126887 I,
               -21
               .50790828055269934758*10  + .0017696990248291598135 I],
        C1 G(nu1, nu2) + C2 q1(nu1) q1(nu2)]


```

The typical structure of a photon self-energy,

$$C1 G(\nu_1, \nu_2) + C2 q_1(\nu_1) q_1(\nu_2),$$

can be seen. The difference to the one-loop self-energy (c) is just the fact, that this graph is more divergent. So the constants C1 and C2 have an additional list entry, the order ε^{-2} .

Next we demonstrate a three-point function. All momenta are on-shell, e.g. $q_{10} := Mz_0$; $q_{20} := Mz_0/2$; $q_{21} := \sqrt{Mz_0^2 - Melec^2}$; is passed to Maple with Insert Maple Command.

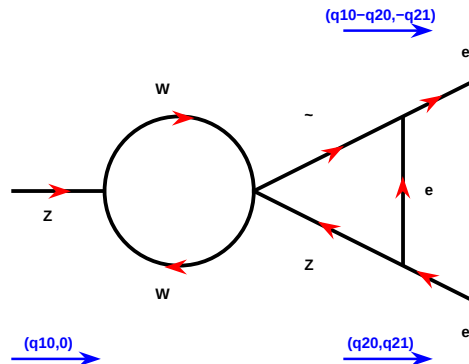

```

GF8 := [
          -35
          [C1 = [0, - .82353974706799645789*10  - .64017338869752026115*10  I,
          -25

```


$$\begin{aligned}
& - .30410069590311173109*10^{-8} - .86001332568491139242*10^{-9} I], \\
C2 = & [0, .16428685998560205727*10^{-34} - .72770813279248241968*10^{-25} I, \\
& - .31775075936778308993*10^{-7} - .89861644838148378070*10^{-8} I], \\
C3 = & [0, .25907616430369099002*10^{-27} + .17084563249491568053*10^{-27} I, \\
& .50023692425121327568*10^{-10} - .38336659269131090697*10^{-10} I], \\
C4 = & [0, .56375581291706017052*10^{-27} + .83584350815468097846*10^{-26} I, \\
& .52269088721608778944*10^{-9} - .40057463723369682265*10^{-9} I], \\
C5 = & [0, .11444962108462501382*10^{-27} - .21574341953884228136*10^{-27} I, \\
& - .13104643398124069502*10^{-26} + .25219418322926334904*10^{-26} I], \\
C6 = & [0, .19581694212974079513*10^{-27} - .32129543956635657630*10^{-27} I, \\
& - .22477792468575032187*10^{-26} + .37675015987648266663*10^{-26} I], \\
C7 = & [0, .13476989938404571673*10^{-31} + .21449295663578860996*10^{-31} I, \\
& .10998568100*10^{-23} - .26575450025692144978*10^{-14} I], \\
C8 = & [0, - .13476989941451368157*10^{-31} - .21449295669672453982*10^{-31} I, \\
& - .11492263298*10^{-22} + .27768333121127352587*10^{-13} I], \\
C9 = & [0, .31582291657035101225*10^{-26} - .30101578572250827460*10^{-26} I, \\
& .10838466684439346062*10^{-9} + .56893589844240048516*10^{-10} I], \\
C10 = & [0, - .98315817920409517794*10^{-36} - .13705392377889147738*10^{-26} I, \\
& .11324969215000662291*10^{-8} + .59447352866059701005*10^{-9} I], \\
C11 = & [0, .76454675644007305666*10^{-27} - .48786422812941166168*10^{-26} I,
\end{aligned}$$

$$\begin{aligned}
& .25011846212167898923 \cdot 10^{-9} - .19168329634264528256 \cdot 10^{-9} I], \\
C12 = & [0, - .20628807340956139895 \cdot 10^{-26} - .21423923511009696554 \cdot 10^{-25} I, \\
& .26134544360394034972 \cdot 10^{-8} - .20028731861370353818 \cdot 10^{-8} I], \\
C1 (1 \&* Dg(nu1)) + C2 \&*(1, Dg5, Dg(nu1)) + C3 (1 \&* Dg0) q2(nu1) \\
& + C4 \&*(1, Dg5, Dg0) q2(nu1) + C5 (1 \&* Dg1) q2(nu1) \\
& + C6 \&*(1, Dg5, Dg1) q2(nu1) + C7 (1 \&* ONE) q1(nu1) \\
& + C8 (1 \&* Dg5) q1(nu1) + C9 (1 \&* Dg0) q1(nu1) \\
& + C10 \&*(1, Dg5, Dg0) q1(nu1) + C11 (1 \&* Dg1) q1(nu1) \\
& + C12 \&*(1, Dg5, Dg1) q1(nu1)]
\end{aligned}$$

Of course the result has more form factors as the diagrams evaluated before. The reason for this is, that as external particles vector bosons as well as fermions occur.

B Technical details

B.1 File structure

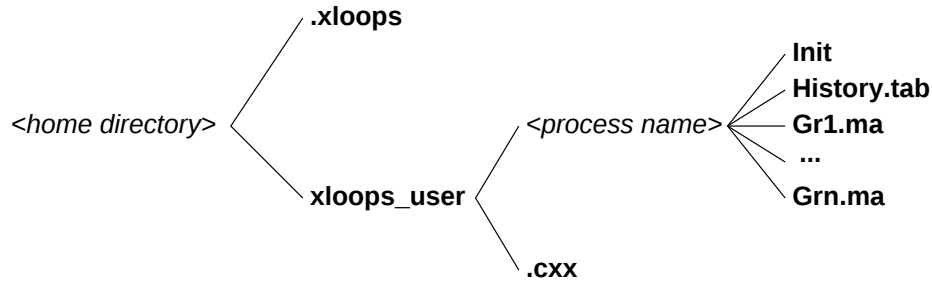

To understand which files $\chi loops$ uses for loading and saving of processes, it is necessary to have a short glance on the file structure, which $\chi loops$ writes into every user's home directory. First of all $\chi loops$ creates the subdirectory `xloops_user`. In this directory $\chi loops$ writes all user-specific data. If the user now starts to input a new process, $\chi loops$ creates in `xloops_user` a new subdirectory, which has the same name as the process. In this subdirectory $\chi loops$ writes to basic files: the file `Init` with all options entered for this process (e.g. the model), and the file `History.tab`, where for every diagram a corresponding number and a particle list is saved. If one graph from this list is calculated, $\chi loops$ creates a new file to save the result. The name of this file includes the number of the diagram in the particle list. If the user now tries to evaluate this graph again, $\chi loops$ looks for the corresponding file and reads the result.

B.2 The one-loop library

To avoid multiple evaluation of one-loop integrals $\chi loops$ can read these integrals from a pre-built library. This library is produced with by the `OneLoopLib` procedures and written to the directory, which is indicated by the variable `LibPath`. If the `Xwindows` interface is used, this variable points to a common directory, where all integrals are saved. Otherwise the user can set this variable to the directory, where he has his own library stored. If some integrals in the library are missing, $\chi loops$ creates them automatically.¹

In practice it is necessary to store not only the general mass case of each integral. Several special cases are also needed. The correspondence is

$$Bp_0p_1t_1t_2n_1.1LOOP \iff OneLoop2Pt(p_0, p_1, q, m_1, m_2, t_1, t_2)$$

$$\begin{aligned} & Cp_0p_1p_2t_1t_2t_3n_1n_2i_1i_2i_3i_4i_5i_6.1LOOP \iff \\ & OneLoop3Pt(p_0, p_1, p_2, q_1, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3). \end{aligned}$$

¹Currently only supported on Unix platforms.

The additional numbers n_1, n_2 and the optional numbers $i_1, i_2, i_3, i_4, i_5, i_6$ specify the different kinematical arrangements which have to be taken into account. In the following tables we list the conditions which belong to each case:

Two-point functions:

conditions		n_1	method of solution	effective n -point
1	2			
$q = 0$	$m_1 = m_2$	triv.	D	1
	—		P	1
$m_1 = 0$	—	1	R	2
$m_2 = 0$	—	2	R	2
$q^2 + m_1^2 - m_2^2 = 0$	—	3	R	2
$q^2 - m_1^2 + m_2^2 = 0$	—	4	R	2
$q + m_1 + m_2 = 0$	—	5	R	2
$q - m_1 + m_2 = 0$	—	6	R	2
$q + m_1 - m_2 = 0$	—	7	R	2
$q - m_1 - m_2 = 0$	—	8	R	2

Three-point functions:

conditions				$n_1 n_2$	method of solution	effective n -point
1	2	3	4			
$q_{21} = 0$	$q_{20} = 0$	$q_1 = 0$	$m_1 = m_2 = m_3$	triv.	$2 \times D$	1
			$m_1 = m_2$	triv.	$P D$	1
			$m_1 = m_3$			1
			$m_2 = m_3$			1
			—	triv.	P	1
		$m_2 = m_3$	$q_1 + m_1 + m_3 = 0$	11	$D R$	2
			$q_1 + m_1 - m_3 = 0$	12		
			$q_1 - m_1 + m_3 = 0$	13		
			$q_1 - m_1 - m_3 = 0$	14		
			—	10	D	2
	$q_1 = q_{20}$	$m_1 = m_2$	$q_1 + m_1 + m_3 = 0$	21	$D R$	2
			$q_1 + m_1 - m_3 = 0$	22		
			$q_1 - m_1 + m_3 = 0$	23		
			$q_1 - m_1 - m_3 = 0$	24		
			—	20	D	2
	$q_{20} = 0$	—	—	40	P	2
	$q_1 = 0$	—	—	50	$P L$	2
	$q_1 = q_{20}$	—	—	60	P	2
	$(q_{20}^2 - m_2^2)q_1 - (q_1^2 - m_1^2)q_{20} - m_3^2(q_{20} - q_1) = 0$			70	P	2
	—	—	—	80	P	2
$q_1 = 0$	$m_1 = m_3$		$\sqrt{q_{20}^2 - q_{21}^2} + m_1 + m_2 = 0$	31	$L D R$	2
			$\sqrt{q_{20}^2 - q_{21}^2} + m_1 - m_2 = 0$	32		
			$\sqrt{q_{20}^2 - q_{21}^2} - m_1 + m_2 = 0$	33		
			$\sqrt{q_{20}^2 - q_{21}^2} - m_1 - m_2 = 0$	34		
	—	—	—	30	$L D$	2
	—	—	—	90	$P L$	2

conditions					method of	effective
1	2	3	4	$n_1 n_2$	solution	n -point
$q_{20} - q_1 = q_{21}$	$q_{20} = -q_{21}$	—	—	—		3
	$m_3 \neq 0$	—	—	C0	S	3
$q_{20} - q_1 = -q_{21}$	$q_{20} = q_{21}$	—	—	—		3
	$m_3 \neq 0$	—	—	D0	S	3
$q_{20} = q_{21}$	$m_2 \neq 0$	—	—	E0	S	3
$q_{20} = -q_{21}$	$m_2 \neq 0$	—	—	F0	S	3
$q_{20}^2 - q_{21}^2 = m_2^2$	$q_1^2 = m_1^2$	$m_3 = 0$	—	G0	S	3
$(q_{20} - q_1)^2 - q_{21}^2 = m_1^2$	$q_{20}^2 - q_{21}^2 = m_3^2$	$m_2 = 0$	—	H0	S	3
$(q_{20} - q_1)^2 - q_{21}^2 = m_2^2$	$q_1^2 = m_3^2$	$m_1 = 0$	—	I0	S	3

The table shows in the first columns the conditions to the masses m_i and the external momenta for a special case. Then the number occurring in the name of the file, in which the special case is saved is given. In the following two columns the method of solving this integrals and the effective n -point function to solve is given. The abbreviations for the method of solution have the following meaning:

- D Differentiation to the squares of masses.
- P Solving by partial fraction decomposition.
- R Special case of the $\mathcal{R}$ function, either vanishing or equal arguments.
- L Solution by Lorentz transformation and reduction of parallel space.
- S Summands vanish in the sum of residua, e.g. some residua are 0.

For the tensor integrals of the three point function the following additional cases occur:

conditions				method of	effective
1	2	3		solution	n -point
$m_1 = 0$	—	—	$i_1 = 4$	R	3
	$m_2 = 0$	—	$i_1 = 6$	R	3
		$m_3 = 0$	$i_1 = 7$	R	3
	$m_3 = 0$	—	$i_1 = 5$	R	3
$m_2 = 0$	—	—	$i_1 = 2$	R	3
	$m_3 = 0$	—	$i_1 = 3$	R	3
$m_3 = 0$	—	—	$i_1 = 1$	R	3
$q_1^2 - m_1^2 + m_3^2 = 0$ $q_1^2 + m_1^2 - m_3^2 = 0$	$m_1 \neq 0$	—	$i_2 = 1$	R	3
			$i_2 = 2$	R	3
$q_1^2 - m_2^2 + m_3^2 = 0$ $q_1^2 + m_2^2 - m_3^2 = 0$	$m_2 \neq 0$	—	$i_3 = 1$	R	3
			$i_3 = 2$	R	3
$q_{20}^2 - m_2^2 + m_3^2 = 0$ $q_{20}^2 + m_2^2 - m_3^2 = 0$ $q_{20}^2 - q_{21}^2 - m_2^2 + m_3^2 = 0$ $q_{20}^2 - q_{21}^2 + m_2^2 - m_3^2 = 0$	$m_2 \neq 0$	—	$i_4 = 1$	R	3
			$i_4 = 2$	R	3
			$i_4 = 3$	R	3
			$i_4 = 4$	R	3
$q_1^2 - m_1^2 + m_2^2 = 0$ $q_1^2 + m_1^2 - m_2^2 = 0$ $(q_{20} - q_1)^2 - m_1^2 + m_2^2 = 0$ $(q_{20} - q_1)^2 + m_1^2 - m_2^2 = 0$	$m_1 \neq 0$	—	$i_5 = 1$	R	3
			$i_5 = 2$	R	3
			$i_5 = 3$	R	3
			$i_5 = 4$	R	3
$q_{20}^2 - q_{21}^2 - m_1^2 + m_2^2 = 0$ $q_{20}^2 - q_{21}^2 + m_1^2 - m_2^2 = 0$	$m_2 \neq 0$	—	$i_6 = 1$	R	3
			$i_6 = 2$	R	3

To make the notation clearer, we give the following examples:

$Bp_0p_1t_1t_2.1\text{LOOP}$	$\text{OneLoop2Pt}(p_0, p_1, q, m_1, m_2, t_1, t_2)$
$Bp_0p_1t_1t_21.1\text{LOOP}$	$\text{OneLoop2Pt}(p_0, p_1, q, 0, m_2, t_1, t_2)$
$Bp_0p_1t_1t_22.1\text{LOOP}$	$\text{OneLoop2Pt}(p_0, p_1, q, m_1, 0, t_1, t_2)$
$Bp_0p_1t_1t_23.1\text{LOOP}$	$\text{OneLoop2Pt}(p_0, p_1, \sqrt{m_2^2 - m_1^2}, m_1, m_2, t_1, t_2)$
$Bp_0p_1t_1t_24.1\text{LOOP}$	$\text{OneLoop2Pt}(p_0, p_1, \sqrt{m_1^2 - m_2^2}, m_1, m_2, t_1, t_2)$
$Cp_0p_1p_2t_1t_2t_3.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_31.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, 0, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_32.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, q_{21}, q_1, \sqrt{q_{20}^2 - q_{21}^2}, 0, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_33.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, q_1 - q_{20}, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_34.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, -q_{20}, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_35.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, q_{20} - q_1, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_36.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_{20}, q_{20}, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_37.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, 0, 0, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_38.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, q_1, q_1, 0, m_1, m_2, m_3, t_1, t_2, t_3)$
$Cp_0p_1p_2t_1t_2t_39.1\text{LOOP}$	$\text{OneLoop3Pt}(p_0, p_1, p_2, 0, q_{20}, q_{21}, m_1, m_2, m_3, t_1, t_2, t_3)$

B.3 Run time and numerical stability

Typical run times for the different integrals are displayed in the following table. We used two different systems: (i) a DEC Alpha 8400 workstation (ii) a PC with i586 chip, 32 MB RAM and 133 MHz frequency running Linux. All systems are working with Maple V. Without using the library we found the following run times:

	DEC Alpha 8400		i586 133MHz	
tensor rank	numerical	algebraical	numerical	algebraical
One-loop two-point functions				
0	0.02 s	0.04 s	0.04 s	0.06 s
1	0.04 s	0.21 s	0.06 s	0.26 s
2	0.07 s	0.28 s	0.07 s	0.48 s
3	0.08 s	0.41 s	0.09 s	0.76 s
One-loop three-point functions				
0	2.54 s	1.83 s	4.83 s	3.31 s
1	2.57 s	2.23 s	5.09 s	3.69 s
2	3.01 s	3.62 s	5.67 s	6.14 s
3	3.78 s	4.16 s	7.61 s	34.58s

It should be emphasized that these are the times which are necessary to generate the functions once and forever using the `OneLoopLibnPt` routines. If they once are stored in the `LibPath` directory they may be read in quickly. With assigned `LibPath` we get:

	DEC Alpha 8400		i586 133MHz	
tensor rank	numerical	algebraical	numerical	algebraical
One-loop two-point functions				
0	0.34 s	0.03 s	0.08 s	0.02 s
1	0.39 s	0.05 s	0.09 s	0.03 s
2	0.43 s	0.06 s	0.19 s	0.03 s
3	0.47 s	0.06 s	0.20 s	0.04 s
One-loop three-point functions				
0	1.30 s	0.09 s	4.77 s	0.47 s
1	1.32 s	0.10 s	4.81 s	0.57 s
2	1.36 s	0.12 s	5.20 s	0.74 s
3	1.88 s	0.45 s	6.72 s	1.71 s

The accuracy and stability of numerical results may suffer from cancellations of large, approximately equal dilogarithms. Since **Maple** supports calculations of arbitrary precision, it is always possible to increase the number of digits to improve accuracy – instead of Fortran programs which are limited to Fortran’s restricted accuracy.

Usually we calculated with 20 or 40 digits. For all practical purposes our numerical results were not influenced significantly – only in the last four or five digits – if the number of digits increased.

B.4 The χ loops distribution

The distribution (packed in `xloops.tgz`) consists of the following files:

```

README          graphen0.tcl      graphenp.tcl      particles.txt
XLwidget.tcl    graphen1.tcl      help.tcl          xlimit.tcl
configure*      graphen2.tcl      history.tcl       xloops.prototyp
convert.tcl     graphen2a.tcl     maple.tcl
graphen.tcl     graphen2b.tcl     model.tcl

MapleVR1:
cfcn.ma         make_lib.map      numint.ma_unix   simple.ma
evalproc.ma     mess.isolatin     numint.ma_vms    test_maple_bug.map
fmrules.ma      mess.ma           oneloop.ma        twoloop.ma
fmuser.ma       mess.no_iso       pv.ma            unvalue.ma
loops.ma        numint.ma         r.ma             values.ma

MapleVR3:
cfcn.ma         make_lib.map      numint.ma_unix   simple.ma
evalproc.ma     mess.isolatin     numint.ma_vms    test_maple_bug.map
fmrules.ma      mess.ma           oneloop.ma        twoloop.ma
fmuser.ma       mess.no_iso       pv.ma            unvalue.ma
loops.ma        numint.ma         r.ma             values.ma

cxx:
div0.cxx        gauss.h           makehead.solaris numint2.vms*
div0.h          incl.cxx          makethread.0     nvegas.c
dpc1.in         main.cxx          makethread.1     pvegas.c
dpc2.in         makefile.rest     makethread.2     utils.cxx
dpc3.in         makefile.vms      numint.cxx       utils.h
dpc4.in         makehead.AIX      numint.prototyp  vegas.c
funct.cxx       makehead.Linux    numint1.unix*
funct.h         makehead.generic  numint1.vms
gauss.cxx       makehead.osf      numint2.unix*
```

lib:
B00110.1loop

manual:
manual.html

xbms:

Hp111t0.xbm	Hp312t9.xbm	Hp412t9.xbm	p310t2.xbm	p412t13.xbm
Hp112t0.xbm	Hp410t0.xbm	attention.xbm	p311t0.xbm	p412t14.xbm
Hp112t1.xbm	Hp411t0.xbm	file.xbm	p311t1.xbm	p412t15.xbm
Hp112t2.xbm	Hp411t1.xbm	help.xbm	p311t4.xbm	p412t16.xbm
Hp210t0.xbm	Hp411t2.xbm	insmath.xbm	p311t5.xbm	p412t17.xbm
Hp211t0.xbm	Hp412t0.xbm	leftarrow.xbm	p312t0.xbm	p412t18.xbm
Hp211t1.xbm	Hp412t1.xbm	p111t0.xbm	p312t1.xbm	p412t19.xbm
Hp212t0.xbm	Hp412t10.xbm	p111t1.xbm	p312t10.xbm	p412t2.xbm
Hp212t1.xbm	Hp412t11.xbm	p112t0.xbm	p312t11.xbm	p412t20.xbm
Hp212t10.xbm	Hp412t12.xbm	p112t1.xbm	p312t12.xbm	p412t21.xbm
Hp212t11.xbm	Hp412t13.xbm	p112t2.xbm	p312t13.xbm	p412t22.xbm
Hp212t2.xbm	Hp412t14.xbm	p112t3.xbm	p312t2.xbm	p412t23.xbm
Hp212t3.xbm	Hp412t15.xbm	p1proc.xbm	p312t3.xbm	p412t24.xbm
Hp212t4.xbm	Hp412t16.xbm	p210t0.xbm	p312t4.xbm	p412t25.xbm
Hp212t5.xbm	Hp412t17.xbm	p210t1.xbm	p312t5.xbm	p412t26.xbm
Hp212t6.xbm	Hp412t18.xbm	p211t0.xbm	p312t6.xbm	p412t27.xbm
Hp212t7.xbm	Hp412t19.xbm	p211t1.xbm	p312t7.xbm	p412t28.xbm
Hp310t0.xbm	Hp412t2.xbm	p211t2.xbm	p312t8.xbm	p412t3.xbm
Hp311t0.xbm	Hp412t20.xbm	p211t3.xbm	p312t9.xbm	p412t4.xbm
Hp311t1.xbm	Hp412t21.xbm	p212t0.xbm	p3proc.xbm	p412t5.xbm
Hp312t0.xbm	Hp412t22.xbm	p212t1.xbm	p410t0.xbm	p412t6.xbm
Hp312t1.xbm	Hp412t23.xbm	p212t10.xbm	p410t3.xbm	p412t7.xbm
Hp312t10.xbm	Hp412t24.xbm	p212t11.xbm	p411t0.xbm	p412t8.xbm
Hp312t11.xbm	Hp412t25.xbm	p212t2.xbm	p411t1.xbm	p412t9.xbm
Hp312t12.xbm	Hp412t26.xbm	p212t3.xbm	p411t2.xbm	p4proc.xbm
Hp312t13.xbm	Hp412t27.xbm	p212t4.xbm	p411t6.xbm	rightarrow.xbm
Hp312t2.xbm	Hp412t28.xbm	p212t5.xbm	p411t7.xbm	schraff.xbm
Hp312t3.xbm	Hp412t3.xbm	p212t6.xbm	p411t8.xbm	xloops.gif
Hp312t4.xbm	Hp412t4.xbm	p212t7.xbm	p412t0.xbm	xloops.xbm
Hp312t5.xbm	Hp412t5.xbm	p212t8.xbm	p412t1.xbm	
Hp312t6.xbm	Hp412t6.xbm	p212t9.xbm	p412t10.xbm	
Hp312t7.xbm	Hp412t7.xbm	p2proc.xbm	p412t11.xbm	
Hp312t8.xbm	Hp412t8.xbm	p310t0.xbm	p412t12.xbm	

Bibliography

- [1] B. W. Char, K. O. Geddes, G. H. Gonnet, B. L. Leong, M. B. Monagan, S. M. Watt. *Maple V Language Reference Manual*. Springer (1991)
- [2] B. W. Char, K. O. Geddes, G. H. Gonnet, B. L. Leong, M. B. Monagan, S. M. Watt. *Maple V Library Reference Manual*. Springer (1991)
- [3] G. P. Lepage. *J. Comp. Phys.* **27** (1978) 192
- [4] G. P. Lepage. *Cornell Univ. Preprint CLNS-80/447* (1980)
- [5] J. K. Ousterhout. *Tcl und Tk – Entwicklung grafischer Benutzerschnittstellen für das XWindow-System*. Addison-Wesley (1995)
- [6] L. Brücher, J. Franzkowski, D. Kreimer. *Comp. Phys. Comm.* **85** (1995) 153
- [7] L. Brücher, J. Franzkowski, D. Kreimer. *Univ. Mainz Preprint MZ-TH/97-23* (1997)
- [8] B. Stroustrup. *The C++ Programming Language*. Addison-Wesley (1995)
- [9] R. Kreckel. *Irreduzible Zwei-Loop-Beiträge zu den Prozessen $\gamma\gamma \rightarrow \pi\pi$ und $\eta \rightarrow \pi\gamma\gamma$* . Diploma thesis, Univ. Mainz (1997)
- [10] R. Kreckel. *Univ. Mainz Preprint MZ-TH/97-30* (1997)
- [11] Particle Data Group. *Phys. Rev.* **D54** (1996) 1
- [12] B. W. Lee, C. Quigg, H. B. Thacker. *Phys. Rev.* **D16** (1977) 1519
- [13] H. Veltman. *Phys. Rev.* **D41** (1990) 2294
- [14] K. Riesselmann, in: B. A. Kniehl (ed.). *Perspectives for Electroweak Interactions in e^+e^- Collisions*, page 175. World Scientific (1995)
- [15] K. Aoki, Z. Hioki, R. Kawabe, M. Konuma, T. Muta. *Suppl. Prog. Theor. Phys.* **73** (1982) 1
- [16] O. Nachtmann. *Phänomene und Konzepte der Elementarteilchenphysik*. Vieweg (1986)
- [17] J. F. Gunion, H. E. Haber, G. Kane, S. Dawson. *The Higgs Hunter's Guide*. Addison Wesley (1990)
- [18] B. C. Carlson. *Special Functions of Applied Mathematics*. Academic Press (1977)
- [19] L. Brücher, J. Franzkowski, D. Kreimer. *Mod. Phys. Lett.* **A9** (1994) 2335
- [20] L. Lewin. *Polylogarithms and Associated Functions*. North Holland (1981)

Index

A		I	
About	21	IBM AIX	8
access	7	Insert Maple	
antiparticles	21	Command	15, 17, 19
arrow	12, 16, 21	Insert Particle	
– direction	12, 16	Properties	16, 17, 20
– inversion	21	installation	7
– misplaced	25	integral representation ..	14, 15
– placement	21	integration	
– position	25	– Monte Carlo	5
– position on the ruler	26	– numerical	5, 8
Arrow Scaling	26	intentions	19
ascii	8	Isolatin 1	8
B		iterations	21
bash	7, 8	K	
C		kinematical variables	17
C++	5, 7	– assignment	17
Cancel 	23	L	
character encoding	8	Linux	8
charge	12, 21	Load Process	19, 23
– conjugation	21	LoopPath	10
CKM matrix		Loops	11, 16, 20
– assignment	16	Lorentz structure	13, 18
Close 	16	M	
Close	23	<i>main window</i> .	9, 11, 15, 16, 21
closed loops	11, 20	Makefile	8
Columns	25	Maple	5, 7, 15, 16, 19
<i>command bar</i>	21	– release	8, 9
comments	6	– session	10, 19
configure	7, 8	Maple part	9
copyright	6	– installation	9
couplings		masses	
– assignment	16, 17	– assignment	16, 17
– electromagnetic	15	– infinitesimal	
– values	20	imaginary part	15
Create Process	19	– numerical input	19
D		– of light fermions	21
<i>diagram area</i>	21	– of neutrinos	20
<i>diagram window</i>		– values	20
... 12, 13, 16, 21, 23, 25		Massless Light Fermions	21
Digital Unix	8	master topology	12
Dirac γ	13, 18	E	
distribution	7	e	15
E		E. Full 	17
<i>eeZ</i> vertex	16	Eval. Full 	13, 16
Eval. Full 	13, 16	Eval. Numeric 	15, 16
Evaluate 	13, 16	evaluation	
evaluation		– modes	13
– modes	13	executable file	8
executable file	8	Export	21
Export	21	Ext. Lines	11, 16, 20
Ext. Lines	11, 16, 20	external lines	11, 20
external lines	11, 20	external momenta ...	13, 15, 16
external momenta ...	13, 15, 16	external particles	17
external particles	17	– on-shell	17
– on-shell	17	F	
F		fermion line	
fermion line		– direction	16
– direction	16	fermion number	12, 21
fermion number	12, 21	fermions	21
fermions	21	File	15–17, 19, 23
File	15–17, 19, 23	<i>file window</i>	23
<i>file window</i>	23	form factors	13, 18
form factors	13, 18	G	
G		GeV	17
GeV	17	ghost number	12, 21
ghost number	12, 21	Graphs	23
Graphs	23	H	
H		Help	12, 16, 21
Help	12, 16, 21	Higgs mass	15
Higgs mass	15	Higgs self-energy	12
Higgs self-energy	12	History	20, 23
History	20, 23	<i>history table</i>	23
<i>history table</i>	23	– size	25
– size	25	html version	8, 21
html version	8, 21	I	

